

2025 | WIHA Topseller catalogue



Wiha - Top products for your success

What distinguishes good hand tools? One thing above all: their ability to make your job noticeably easier.

If they also protect your health, ensure your safety and meet the highest quality standards for a sustainable, long lifespan, we call them outstanding – or in short: Wiha hand tools.

We present to you our TOP sellers 2025 that have proven to be the best of the best in criteria such as user benefits, application options and flexibility, demand, potential for individual further development, level of innovation, or customer feedback. Use our products to guarantee your success – now!

The complete and comprehensive range of Wiha products can be found at www.wiha.com or in the digital catalog of Wiha (www.wiha.com/digicat).









Wiha - A company and its people. Today and in the future.

How do we define corporate success? We focus just as much on sustainable corporate and organizational development as we do on individual development, freedom, and further development of our employees, customers, and partners. At home in the heart of the Black Forest, the responsible dealing with nature comes naturally to Wiha. We consciously place this aim above the maximization of sales and profits.

Our corporate culture and all organizational processes and aims are founded on the central values of responsibility, respect, and integrity.

Wiha as a partner for the future

Promotion of employees

We support them in their further development and create best working conditions.

Active exchange with users

Through close contact and constructive exchange we can accomplish our goals together.

Acting responsibly

We live the principles of social responsibility and obligation to support our suppliers.

Reliable partnership

Our active and personal partner management with the specialist trade creates a trusting sense of togetherness and care for each other.

Social commitment and cooperation

Long-term partnerships with local educational and social institutions establish our place in the middle of society.

Committed to sustainability

Products with a long service life, resource-saving processes, goals for minimizing waste, energy use, and emissions are part of our holistic sustainability strategy.



Wiha design awards

Ergonomics, highly prized by all.











To us, positive feedback from people for whom we make our tools is the most rewarding confirmation of our work. All the same, we can also be more than a little proud when the high ergonomic quality of our products is confirmed at the "highest" level, as many of them have been distinguished with coveted design awards. In addition to this, our company and production quality were also honoured with awards. With this praise and confirmation from every direction, it's no wonder that Wiha are on the right track with ergonomic tool concepts and a future-oriented philosophy.





































reddot winner 2023















Wiha tools with AGR approval

The world's first tools bearing the seal for efficient and health-friendly work



Testet and recommended by the forum: Gesunder Rücken - besser Leben e.V. and the Federal Association of German Back Schools (EdR), More information from: AGR e.V., Aktion Gesunder Rücken e.V., Stader Str.6, D-27432 Bremervörde, Tel. +49 4761 926 358 0. www.arc.nev.de



Certified ergonomics: The Wiha SoftFinish® screwdrivers with their handle size concept, the electric screwdriver speedE®II as well as the

tools case XXL4: It is awe-aspiring to be the world's only hand tool manufacturer to have products honoured with the renowned AGR seal of approval. Very few everyday objects are able to pass the stringent tests of the AGR, whose seal enjoys broad acceptance by medical professionals for very good reason.


For many years, the AGR has been dedicated to promoting and researching the prevention of back pain. It also offers recommendations on products that help to prevent musculoskeletal disorders and back pain.

Wiha has been acknowledged for its ergonomic screwdriver handle size concept, the speedE®II electric screwdriver and the tool case XXL 4. To us this recognition is a confirmation of our corporate philosophy – to develop tools enabling professionals not only to work efficiently, but also in a health-friendly way.

Wiha's screwdriver handle size concept features four handle heights and lengths, each optimally adapted to its specific fastening or work task to ensure health-friendly work practices. The speedE®II with its electric drive ensures that the joints and tendons are not strained during extensive



repeated fastening jobs. On top of that, Wiha offers a tool case with many ergonomic advantages – the foldable legs ensure a raised and therefore more comfortable removal of the tools. In addition, work in low positions can be carried out while seated. Vice versa, work in high positions is also no problem thanks to the slip-proof step. The large case rollers additionally ensure that the case can be pulled easily across rough terrain and stairs. When carrying or stowing the case in a vehicle, the two-component handle on the left side ensures comfortable carrying close to the body. Finally, two gas-filled shock absorbers prevent uncontrolled closing of the case lid.

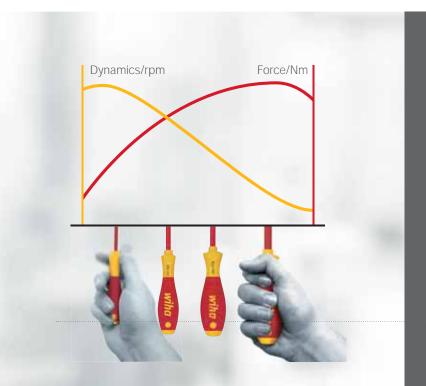

Wiha SoftFinish® handle sizes

Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.

Quick-turning - Motor skills are consistently taken into consideration.

Maximum power transmission, comfortable to use and without loss.



VDE-insulated tools from Wiha

To work safer, more efficiently and with less strain on the body.

Certified safety - from our own safety testing procedure according to IEC standards.



Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC.



Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.



Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.



Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.



Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.



Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.



As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide application oriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GS mark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.

The international standard IEC 60900 defines the construction, safety as well as single, series, and random testing of insulated tools. But with Wiha you don't just work safer, but also healthier and more efficiently. Specially developed ergonomic geometries ensure comfortable handling that protects the body from strain. The result: easier work, less signs of fatigue, more efficiency.



Wiha Promotions


2025




Tool case basic set L mechanic 36-pcs.



Tool case set L eMobility 62-pcs.







Bit Set 25 mm assorted, 1/4" 31-pcs. in box

Order no.	44632
3x ⊖	
6x ⊕	
6x \$	
6x 🏶	
4x 🔳	
1x	wind
1x	
	diam

LIMITED PROMOTIONS


Toolbox set XL SHK 111-pcs.

Order no.	45237
9x) 10
1x	
1x	
1x	See Selection
2x	
1x	
2x ⊖	
1x ⊕	
3x ⊖	40 (10)
1x ⊖	and the same of
2x ⊕	No. of
1x	
1x (7 pcs.)	
1x	
1x	67
1x	
1x	

1x	Mill A di son with the
1x	
1x (8 pcs.)	1
1x (31 pcs.)	
1x	
1x (9 pcs.)	100
1x	
1x	(400)
1x (17 pcs.)	C
1x	
1x	
1x	
1x	



Wall box installation tool set 23 pcs. incl. multifunctional bag







Screwdriver set SoftFinish® 85 years Slotted, Phillips, TORX® 8,5-pcs.

Order no.	46544
3x ⊖ -	
2x ⊕ —	
3x 🏶 —	1 (A ()
1x	
1x	

Jackknife, incl. 6 trapezoidal blades

Order no. 45425



Order no. 45426



Content



Tool case set XXL 4 electric Page 20



Tool set electrician Competence XL Page 25



Tool backpack electric Page 27



Tool set service technician Page 32



Electric screwdriver speedE® PocketDrive Page 46



E-screwdriver, speedE® II electric Page 47



Clamp meter up to 1,000 V AC, CAT IV Page 48



Digital multimeter up to 1,000 V AC, CAT IV Page 49



Screwdriver and bit set slimVario® Page 66



Screwdriver with bit holder set slimVario® electric Page 68



slimBit electric bit set Page 71



Screwdriver set SoftFinish® electric slimFix Page 73



Torque screwdriver set TorqueVario®-S electric Page 88



Torque screwdriver set TorqueVario®-S electric Page 89



Torque screwdriver set TorqueVario®-S electric Page 90



Torque set easyTorque adapter electric Page 91



Screwdriver with bit magazine LiftUp electric Page 101



Screwdriver with bit magazine PocketMax® electric Page 102



Screwdriver with bit magazine LiftUp 26one® Page 104



Screwdriver with bit magazine PocketMax® magnetic Page 107



L-key set in ErgoStar holder Page 119



L-key set in ErgoStar holder Page 121



L-key set in ErgoStar holder Page 121



L-key set in ProStar holder Page 122



BitBuddy® TY bit set, 29 mm Page 131



XLSelector T bit set, 25 mm Page 132



XLSelector Y bit set, 50 mm Page 134



Bit set FlipSelector Standard 25 mm Page 137



Ratchet wrench set insulated 1/2" Page 146



Ratchet wrench set insulated 3/8" Page 147



Nut driver and bit set 1/4" and 1/2" Page 151



Nut driver and bit set 1/4" Page 153



Multifunctional pliers 8in1 Industrial electric

Page 162



Installation pliers TriCut Professional electric

Page 163



diagonal cutters BiCut® Professional with DynamicJoint®

High-performance

Page 163



Stripping diagonal cutters Professional electric with DynamicJoint® Page 166



Soft-faced hammer set "Safety" Page 188



Soft-faced hammer "Safety" medium soft/hard Page 190



Soft-faced hammer dead-blow Page 191



Soft-faced hammer FibreBuzz® deadblow, very hard Page 192





Tool set slimVario® electric Page 35



Tool set electrician Page 39



Workshop trolley set eMobility Page 40



Tool case set XL eMobility Page 42



Voltage and continuity tester 0.5 - 1,000 V AC, CAT IV Page 51



Single-pole, non-contact voltage tester volt detector, explosion protected 12-1,000 VAC Page 54



Flashlight with LED, laser and UV light Seite 58



Floodlight rechargeable 30 W, 3,000 lm Seite 60

1

08

*



Screwdriver set $\textbf{SoftFinish}^{\otimes}$ Page 76



Screwdriver set SoftFinish® Page 79



Fine screwdriver set PicoFinish® Page 80



Fine screwdriver set PicoFinish® ESD Page 81



Torque screwdriver set TorqueVario®-S Page 93



Torque screwdriver with T-handle set TorqueVario®-S T Page 94



Torque screwdriver set TorqueVario®-S **ESD** Page 95



Screwdriver with bit magazine magnetic Page 108



Screwdriver with interchangeable blade set SYSTEM 6 Page 109



Multitool **PocketStar** Page 113



Screwdriver with interchangeable blade set SYSTEM 4 ESD Page 114



L-key with T-handle set ComfortGrip Page 123



L-key set in ErgoStar holder Page 124



L-key set in ProStar holder Page 126



L-key with T-handle set ComfortGrip Page 127



Bit set Collector Standard 25 mm Page 138



Bit set Standard 25 mm Page 140



Micro-bit set ESD Page 140



High-performance offset screwdriver with quick release holder Page 142



Ring ratchet openended spanner set Page 154



Double open-end spanner set Page 155



Double ring ratchet wrench 4in1 Page 156



Reversible ratchet 1/2"



Automatic crimp tool Page 173



Crimp tool Page 174



Pliers wrench Classic Page 181



SMD tweezer set Professional ESD Page 182



Electrician's hammer Page 194



Dowel racket set SoftFinish® Page 195



Electrician's spirit level Page 197



Electrician's Longlife® folding ruler, 2 m Page 198









The range

Designed for those who work with it.

User experiences are incorporated into Wiha tools right from the product development stage. This resulted in high-quality tool sets that are produced for mechanics, electricians and electronics technicians which have been specifically assembled for different requirements. Neatly tucked away and clearly organised in robust, compact tool bags, tools are ready at hand, ensuring work is completed easily and efficiently. Wiha tools prove to be very handy, essential companions especially when stored in a tool case. The shortcomings of standard tool cases were amended – thanks to its practical tool inserts and extra storage space for small parts, the Wiha tool case provides simple, noload tool transport. Even more comfort and every type of support for mobile applications is offered by the Wiha tool backpack, because for some tasks you need to have your hands free.

"A case with all major Wiha tools and innovations - like Christmas for the electrician!"















Tool case set XXL 4 electric

















80-pcs. incl.	. case	930070104
Order-No.		(==)
45734		1
Fastening /	Jamming	
	Screwdriver and bit set slimVario® Mixed, 19-pcs. incl. folding bag (41231) 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby / 1 x Screwdriver with bit holder for slimBits / 1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / 1 x 5.5 mm x 75 mm / 1 x PH1 x 75 mm x 75 mm / 1 x PZ2 x 75 mm / 1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm / 1 x T9 x 75 mm / 1 x T75 mm / 1 x T20 x 75 mm / 1 x 3.0 mm x 75 mm / 1 x 4.0 mm x 75 mm / 1 x 5.0 mm x 75 mm / 1 x	/ 1 x PH2 x 75 mm / 1 x PZ1 0 x 75 mm / 1 x T15 x
$\ominus \oplus \circledast$	Screwdriver set SoftFinish* electric slimFix Slotted, Phillips, PlusMinus/Pozidriv 6-pcs. (38362) 1 x 3.5 mm x 100 mm / 1 x 4.0 mm x 100 mm / 1 x 5.5 mm x 125 mm / 1 x PH1 x 80 mm / 1 x PH2 100 mm	2 x 100 mm / 1 x SL/PZ2 x
$\ominus \oplus \circledast$	Screwdriver with bit magazine PocketMax® electric mixed with 4 slimBits (45296) 1 x 3.5 mm x 75 mm / 1 x PH1 x 75 mm / 1 x PH2 x 75 mm / 1 x SL/PZ2 x 75 mm	
⊖⊕ ₩ ®	Bit set XLSelector Standard 25 mm assorted 31-pcs. 1/4" C6,3 (29417) 1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 3 x T25 / 2 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x XLSelector	/ 2 x T10 / 2 x T15 / 2 x T20 /
	L-key set in ProStar holder Hexagonal ball end matt chrome-plated 9-pcs. (07185) 1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm / 1 x P	
Surveying /	marking / measuring / checking	
	Electrician's Longlife® folding ruler, 2 m metric, 10 segments 15 mm (42068)	
	Electrician's spirit level 40 cm (42074)	
	Voltage and continuity tester 12 - 1,000 V AC, CAT IV incl. 2x AAA batteries (45216)	
Striking / ch	niselling	
	Electrician's hammer with 300 g hammer head 283 mm (42071)	
Stripping / i	nsulating / crimping	
	Stripping multi-tool for round cables 125 mm, 5" (44242)	
Supplying /	holding	
	Pliers set Industrial electric Combination pliers, needle nose pliers, diagonal cutters 3-pcs. (38637) Industrial electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43336) / Industrial electric con DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (33186) / Industrial electric needge straight shape 200 mm, 8" (33178)	
	Industrial electric cable cutter with switchable opening spring 210 mm, 8 1/4" (43663)	
Storage		
	Tool Case XXL III empty (44129)	

Manufactured acc. to IEC 60900.

Design deviations of the pliers reserved







Tool Case XXL III














empty	930070103E
Order-No.	
44129 1	



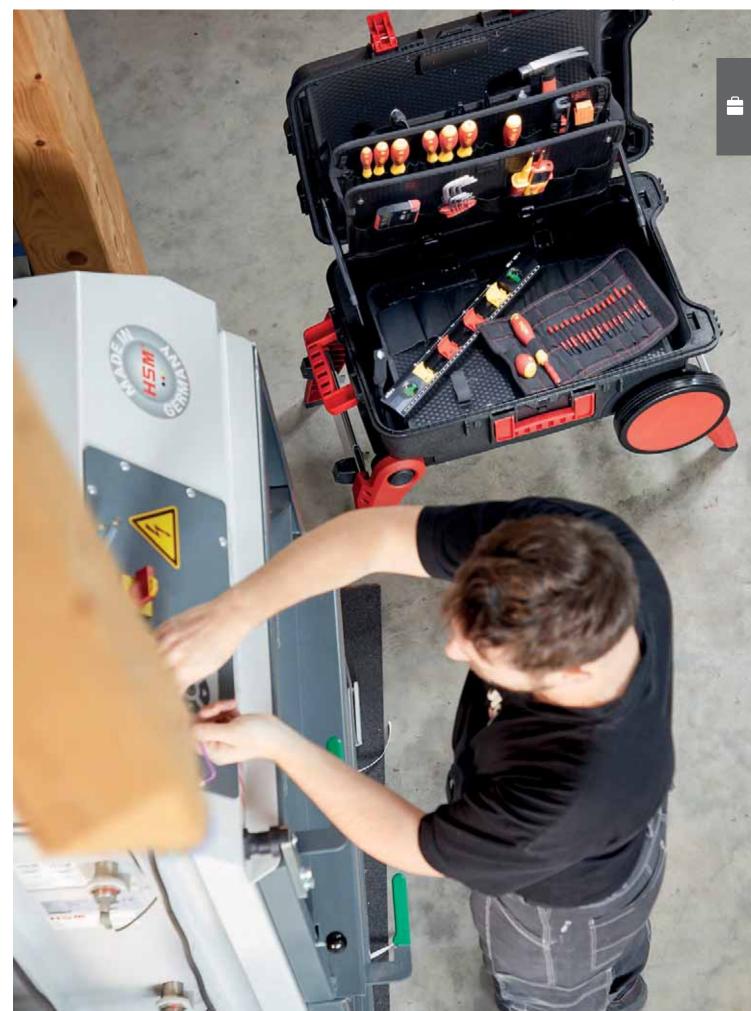











Tool set electrician Competence XL





assorted 81-pcs. incl. case







9300702

Order-No.	
40523	1
Fastening	/ Jamming
0	Screwdriver SoftFinish® electric Hex nut driver 5.5 mm x 125 mm (00856) / 7.0 mm x 125 mm (00858) / 8.0 mm x 125 mm (00859) / 10.0 mm x 125 mm (00861)
\ominus	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391) / 6.5 mm x 150 mm (35392)
⊕	Screwdriver SoftFinish® electric slimFix PlusMinus/Phillips SL/PH1 x 80 mm (35502) / SL/PH2 x 100 mm (35503)
*	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ1 x 80 mm (36329) / SL/PZ2 x 100 mm (36330)
1	Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
	Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395) / PZ2 x 100 mm (35396)
$\overline{\ominus}$	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12.0 mm x 200 mm (03231)
Θ	⊕ Switch cabinet key cross shape 7.0 mm- 9- 5 - 8- 3 - 5 (36114)
$\ominus \oplus \circledast$	Screwdriver with bit magazine LiftUp electric Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits (38611) 1 x 3.0 mm x 75 mm / 1 x 4.0 mm x 75 mm / 1 x 5.5 mm x 75 mm / 1 x PH1 x 75 mm / 1 x PH2 x 75 mm / 1 x SL/PZ2 x 75 mm
	L-key set in Compact holder Hexagonal ball end matt chrome-plated 9-pcs. (01418) 1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm / 1 x Compact holder
⊕⊕⊕®	Bit set XLSelector Standard 25 mm assorted 31-pcs. 1/4" C6,3 (29417) 1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 / 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x XLSelector
Trimming /	['] cutting
I	High-performance diagonal cutters BiCut® Professional with DynamicJoint® Switchable 200 mm, 8" (38191)
ľ	Precision mechanic's diagonal cutters Classic with opening spring 125 mm, 5" (36189)
X	Professional electric diagonal cutters with DynamicJoint® 180 mm, 7" (43340)
Supplying	/ holding
	Water pump pliers Professional electric with push button adjustment 250 mm (37450)
•	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40° 200 mm, 8" (26729)
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26708)
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)
Stripping/	insulating / crimping
X .	Installation pliers TriCut Professional electric 170 mm, 7" (38552)
	Automatic stripping tool up to 6 mm ² 190 mm, 7 1/2" (44617)
***************************************	Stripping tool with self-rotating drag blade for round cables 165 mm (44618)
	Crimping tools for wire-end sleeves 220 mm, 0.14 - 16 (33844)
Surveying	/ marking / measuring / checking
	Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries (43798)
$\overline{\ominus}$	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)
	Folding ruler Longlife 2 m metric, 10 segments 15 mm (27057)
	Control cabinet spirit level 20 cm (36859)
Storage	
	Case





Tool backpack electric





reddot winner 2023







27-pcs.



Order-No.	
45528	1

Fastening / Jamming

\ominus	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391)

		······								
6	4	Screwo	river SoftFin	ish® electr	ic slimFix	Phillins Ph	H1 x 80 mi	m (35393) /	PH2 x 100 i	mm (35394)

Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ2 x 100 mm (36330)

Screwdriver with bit magazine PocketMax* electric mixed with 4 slimBits (45296)

1 x 3.5 mm x 75 mm / 1 x PH1 x 75 mm / 1 x PH2 x 75 mm / 1 x SL/PZ2 x 75 mm

L-key set in ProStar holder Hexagonal ball end matt chrome-plated 9-pcs. (07185)

1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm / 1 x ProStar holder

Supplying / holding

findustrial electric needle nose pliers with cutting edge straight shape 200 mm, 8" (33178)

Industrial electric combination pliers with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (33186)

Trimming / cutting

Industrial electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43336)

Stripping/insulating/crimping

Stripping multi-tool for round cables 125 mm, 5" (44242)

Surveying / marking / measuring / checking

Electrician's Longlife® folding ruler, 2 m metric, 10 segments 15 mm (42068)


Electrician's spirit level 40 cm (42074)

Storage

Backpack

Tested according to IEC 60900.



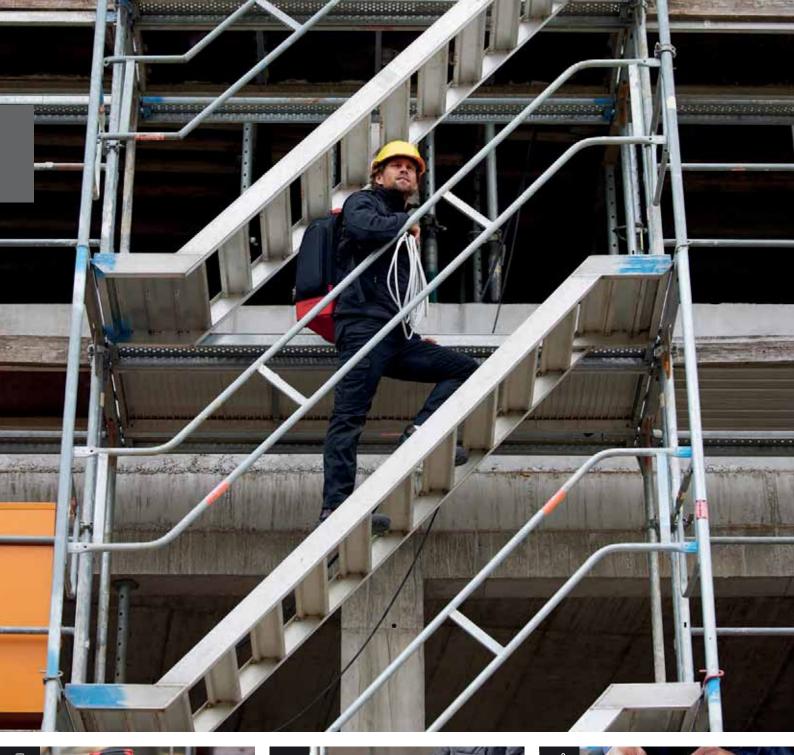

















Tool backpack mechanic





reddot winner 2023

















930031602



Order-No.	É	
45529		1
Fastening /	Jamming	-
Θ	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12.0 mm x 200 mm (03231)	
Θ	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3.5 mm x 100 mm (00691) / 4.5 mm x 125 mm (5.5 mm x 150 mm (00700) / 6.5 mm x 150 mm (00703)	(00697) /
⊕	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 mm (00756) / PH2 x 100 mm (00759)	
0	Screwdriver with bit holder magnetic Stubby, 1/4" 57 mm (29463)	
	Bit set FlipSelector Standard 25 mm assorted 13-pcs. 1/4" C6,3 (39078) 1 x 5.5 mm / 1 x PH2 / 1 x PZ1 / 1 x PZ2 / 1 x PZ3 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x 3.0 mm / 1 x 4.0 mm / 1 x Bit holder magnetic 58 mm 1/4" / 1 x FlipSelector	/ 1 x 5.0 mm
	L-key set in ProStar holder Hexagonal ball end matt chrome-plated 9-pcs. (07185) 1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm / 1 x ProStar holder	/ 1 x 5.0 mm
	Ring ratchet open-end spanner 8 mm x 8 mm (44638) / 10 mm x 10 mm (44640) / 13 mm x 13 mm (44654) / 17 mm x (44658) / 19 mm x 19 mm (44660)	x 17 mm

	Ring ratchet open-end spanner 8 mm x 8 mm (44638) / 10 mm x 10 mm (44640) / 13 mm x 13 mm (44654) / 17 mm x 17 mm (44658) / 19 mm x 19 mm (44660)
Trimmin	g / cutting
X	Heavy-duty diagonal cutters Industrial with DynamicJoint® with switchable opening spring 180 mm, 7" (41272)
	Combination pliers Industrial with DynamicJoint® and OptiGrip with extra long cutting edge 200 mm, 8" (32319)
Supplyin	ng / holding
	Water pump pliers Industrial box type 250 mm (32342)
Striking	/ chiselling
	Engineer's hammer
Surveyin	ng / marking / measuring / checking
	Measuring tape 5 m With belt clip (33251)
Storage	

Backpack













Tool set service technician



9300040




assorted 30-pcs. incl. bag

Order-No.		
43879	1	
Fastening / J	lamming	
Θ	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 5.5 mm x 125 mm (35391)	
1	Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)	
₩	Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395) / PZ2 x 100 mm (35396)	
Θ	PicoFinish* fine screwdriver Slotted 1.5 mm x 40 mm (42384) / 2.0 mm x 40 mm (42388) / 2.5 mm x 50 mm (42391) / 3.0 mm x 50 mm (42394)	
⊕	PicoFinish® fine screwdriver Phillips PH00 x 40 mm (42402) / PH0 x 50 mm (42401)	
\ominus \bigcirc \bigcirc	Switch cabinet key cross shape 7.0 mm- 9- 5 - 8- 3 - 5 (36114)	
	L-key set in Compact holder Hexagonal ball end matt chrome-plated 9-pcs. (01418) 1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm / 1 x Compact holder	
Trimming / c	utting	
X	Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)	
	Electronic needle nose pliers narrow, short head straight form 135 mm, 5 1/3" (26801)	
K	Electronic diagonal cutters wide, pointed head and wire trapping spring without bevelled edge 130 mm, 5 1/8" (26825)	
Supplying / h	nolding	
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)	
Stripping/ in	sulating / crimping	
	Automatic stripping tool up to 6 mm ² 190 mm, 7 1/2" (44617)	
	Stripping tool with self-rotating drag blade for round cables 165 mm (44618)	
Surveying / r	narking / measuring / checking	
Θ	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)	
Storage		
	Toolbag (mechanics/electricians)	

Design deviations of the pliers reserved





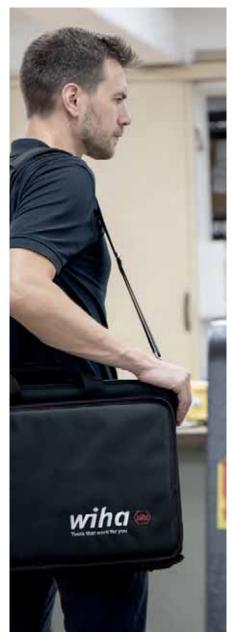





INFOBOX: slimTECHNOLOGY



- 33 % slimmer blades
- Access to low-lying screws Actuating tool for spring clips







7209NK2002







32







IIIIXOU, OL	pos. mon mannanononar bag	72071112002	
Order-No.			
43465		1	
Fastening	/ Jamming		
Θ	slimBit electric bit Slotted 2.0 mm x 75 mm 3.5 mm x 75 mm (41159) / 5.5 mm x 75 m 6.5 mm x 75 mm (34582)		
(1)	slimBit electric bit Phillips PH0 x 75 mm (4 75 mm (34583) / PH2 x 75 mm (34584)	3116) / PH1 x	
₩	slimBit electric bit PlusMinus/Pozidriv SL/PZ1 x 75 mm (34589) / SL/PZ2 x 75 mm (34590)		
₩	slimBit electric bit Pozidriv PZ1 x 75 mm (34585) / PZ2 x 75 mm (34586)		
	slimBit electric bit Hex 3.0 mm x 75 mm (3 x 75 mm (37225) / 5.0 mm x 75 mm (3722	,	
•	slimBit electric bit TORX* $T10 \times 75$ mm (35507) / $T15 \times 75$ mm (35508) / $T20 \times 75$ mm (35509) / $T25 \times 75$ mm (36071)		
0	Insulated nut driver insert 1/4" hexagon he 42 mm (43089) / 5.5 mm x 42 mm (43090) 42 mm (43091) / 7.0 mm x 42 mm (43092) 42 mm (43093) / 10.0 mm x 42 mm (43094) 42 mm (43096) / 13.0 mm x 42 mm (43096)) / 6.0 mm x) / 8.0 mm x 5) / 11.0 mm x	
	slimVario® electric adapter for 1/4" nut driv (43139)	ver 59 mm	
0	Extension slimVario® electric for slimBits 6. mm (43292)	.0 mm x 69.5	
	Screwdriver with bit holder SoftFinish® slim	nVario® electric	
	Fine screwdriver PicoFinish® slimVario® ele	ctric	
	Screwdriver with bit holder SoftFinish® elec Stubby	ctric slimVario	
Storage			
•••••			

mixed, 32 pcs. incl. multifunctional bag

Manufactured acc. to IEC 60900.

Functional bag Empty (43474)





Tool set electrician



13









I

Mixed, 13-pcs. incl. tool pouch

9300025

Order-No.	
36389	1

Fastening / Jamming

Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.5 mm x 125 mm (35501) / 5.5 mm x 125 mm (35391)

Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395) / PZ2 x 100 mm (35396)

Trimming / cutting

Cable cutter Professional electric with switchable opening spring 210 mm, 8 1/4" (43662)

Supplying / holding

 Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Heavy-duty diagonal cutters Professional electric with DynamicJoint* with switchable opening spring 180 mm, 7* (41274)

Stripping/ insulating / crimping

Automatic stripping tool up to 6 mm² 190 mm, 7 1/2" (44617)

Stripping tool with self-rotating drag blade for round cables 165 mm (44618)

Surveying / marking / measuring / checking

─ Voltage tester SoftFinish® single-pole, 110-250 volts
Slotted transparent, with push-on clip 3.0 mm (34745)

Folding ruler LongLife Plus 2 m metric, 10 segments 15 mm (27059)

Storage

Tool kit

Manufactured acc. to IEC 60900.

Design deviations of the pliers reserved









- Innovative unique joint design
- Effective and powerful cutting (compared to pliers without Dynamic Joint)




Tool set electrician






























Tool set electrician



18 pcs






Order-No.	(==)	
44574	1	
Fastening	/ Jamming	
\ominus	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mr 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mr 125 mm (35391)	
₩	Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x mm (35395)	80
₩	Screwdriver SoftFinish® electric slimFix PlusMinus/Poz SL/PZ2 x 100 mm (36330)	idriv
③	Screwdriver SoftFinish® electric slimFix TORX® T10 x 1 mm (36536)	100
Θ	PicoFinish® electric fine screwdriver Slotted 1.5 mm x 50 mm (42374) / 2.5 mm x 65 mm (42376)	
(1)	PicoFinish® electric fine screwdriver Phillips PH00 x 50 mm (42379) / PH0 x 65 mm (42378)	
Supplying	ı / holding	
•	Needle nose pliers Professional electric with cutting eastraight shape 200 mm, 8" (26727)	dge
Stripping/	/ insulating / crimping	
X	Installation pliers TriCut Professional electric 170 mm, (38552)	7"
Trimming	/ cutting	
I	Professional electric diagonal cutters with DynamicJoi 140 mm, 5 1/2" (43326)	nt®
Surveying	/ marking / measuring / checking	
	Electrician's Longlife® folding ruler, 2 m metric, 10 segments 15 mm (42068)	
	Flashlight with LED, laser and UV light including 3 AAA batteries 100 - 310 lm (41286)	4
Θ	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)
	Measuring tape 5 m With belt clip (33251)	
Storage		
	Tool Belt Pouch	

Manufactured acc. to IEC 60900.

Design deviations of the pliers reserved

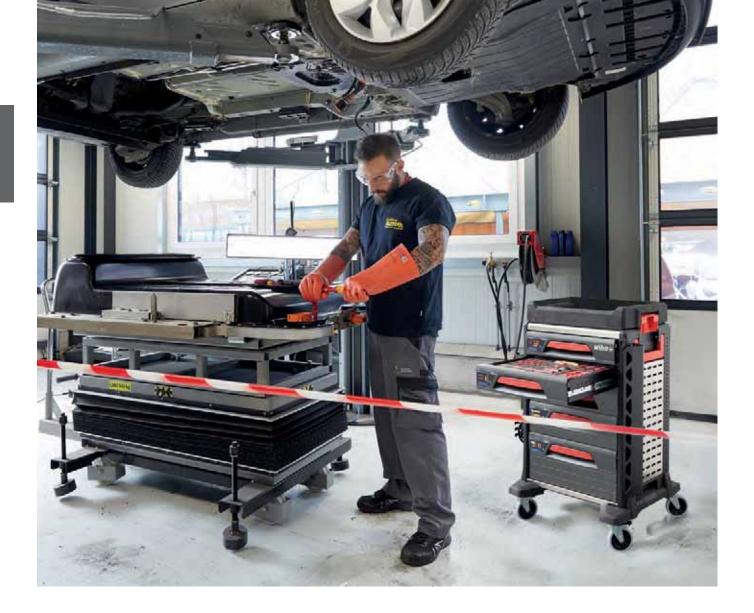

Workshop trolley set eMobility









Workshop trolley empty

Tool case set XL eMobility












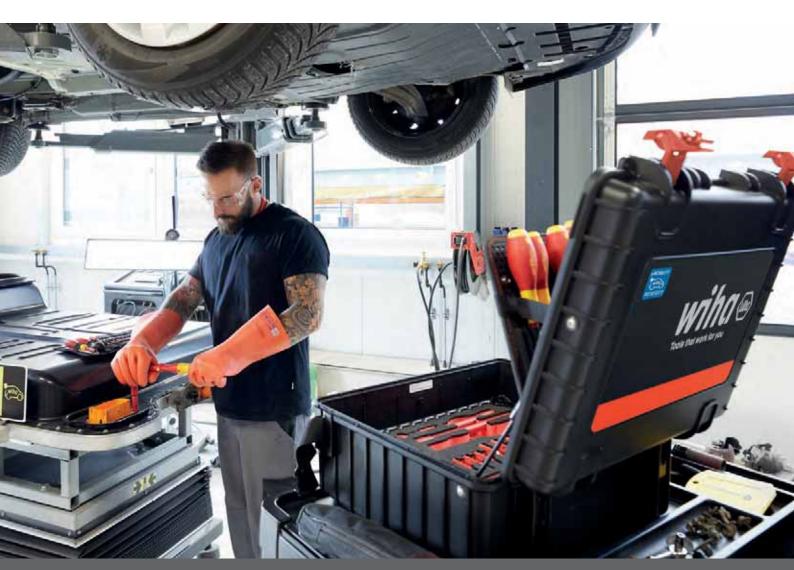





70-pcs.	930073202
Order-No.	
45802	1
Fastening / .	Jamming
Θ	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391) / 6.5 mm x 150 mm (35392)
⊕	Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
•	Screwdriver SoftFinish® electric slimFix TORX® T20 x 100 mm (36538) / T25 x 125 mm (36539) / T27 x 125 mm (36540) / T30 x 125 mm (36541) / T40 x 150 mm (36542)
0	Screwdriver SoftFinish® electric Hex nut driver 7.0 mm x 125 mm (00858) / 8.0 mm x 125 mm (00859) / 10.0 mm x 125 mm (00861) / 13.0 mm x 125 mm (00864)
⊖0₩₩⊕	Torque screwdriver set TorqueVario*-S electric 0,8-5,0 Nm mixed, variably adjustable torque limit, 14 pcs. incl. folding bag (40674) 1 x Torque screwdriver TorqueVario*-S electric variably adjustable torque limit / 1 x Setting tool for torque screwdriver with long handle / 1 x Screwdriver with bit holder SoftFinish* electric slimVario for slimBits / Adapter TorqueVario-S electric for slimBits / 1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / 1 x 5.5 mm x 75 mm / 1 x PH1 x 75 mm / 1 x PH2 x 75 mm / 1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm / 1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm / 1 x Folding bag
	Torque key, electric 3/8" for nut drivers, adjustable torque limit (44163)
0	Insulated nut driver insert 1/4" hexagon head 4.0 mm x 42 mm (43088) / 5.0 mm x 42 mm (43089) / 5.5 mm x 42 mm (43090) / 6.0 mm x 42 mm (43091) / 7.0 mm x 42 mm (43092) / 8.0 mm x 42 mm (43093) / 9.0 mm x 42 mm (43094) / 10.0 mm x 42 mm (43095) / 11.0 mm x 42 mm (43096) / 12.0 mm x 42 mm (43097) / 13.0 mm x 42 mm (43098) / 14.0 mm x 42 mm (43099)
0	Insulated nut driver insert $3/8$ " hexagon head $16.0 \text{ mm} \times 45 \text{ mm} (43071) / 17.0 \text{ mm} \times 45 \text{ mm} (43072) / 18.0 \text{ mm} \times 45 \text{ mm} (43073) / 19.0 \text{ mm} \times 47 \text{ mm} (43074) / 21.0 \text{ mm} \times 47 \text{ mm} (43075) / 22.0 \text{ mm} \times 47 \text{ mm} (43076)$
0	Nut driver insert electric deep 3/8" Double hex 8 8.0 mm x 80 mm (44146) / 10.0 mm x 80 mm (44147) / 12.0 mm x 80 mm (44148)
	Insulated nut driver insert 1/4" internal hexagon 4.0 mm x 65 mm (43110) / 6.0 mm x 65 mm (43112) / 8.0 mm x 65 mm (43113)
	Insulated extension 3/8" for nut driver inserts, insulated 125 mm (43057)
	Insulated extension 3/8" for nut driver inserts, insulated 250 mm (43058)
	Insulated square adapter 3/8" for 1/4" nut driver (44355)
	slimVario® electric adapter for 1/4" nut driver 59 mm (43139)
	Adapter TorqueVario-S electric for 1/4" nut driver (43128)
Supplying / I	holding
	Water pump pliers Professional electric with push button adjustment 250 mm (37450)
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 200 mm, 8" (26711)
	Long flat-nose pliers Professional electric 160 mm, 6 1/2" (26732)
•	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40° 200 mm, 8" (26729)
Trimming / c	cutting
1	Cable cutter Professional electric with switchable opening spring 210 mm, 8 1/4" (43662)
X	Professional electric diagonal cutters with DynamicJoint® 180 mm, 7" (43340)
Stripping / ir	nsulating / crimping
	Cable stripping knife straight cutting edge for round cables in blister pack 200 mm (38798)
Surveying / ı	marking / measuring / checking
	Voltage and continuity tester eMobility 12 – 1,000 V AC, CAT IV incl. 2x AAA batteries (44319)
	Flashlight with LED, laser and UV light including 3 AAA batteries 100 - 310 lm (41286)
Various	
	Warning sign for electric and hybrid vehicles (44357)
Storage	
	Tool case XI, empty

Design deviations of the pliers reserved

Manufactured acc. to IEC 60900.





Electro Safety for professionals.

Quality and precision from one source. All devices convince by the highest measuring accuracy and the best quality not to mention the typical features functionality and durability of Wiha. The "Electrical" product group presents itself with a range of Wiha innovations, starting with the torch, the e-screwdrivers and the measuring device series: from voltage testers to multimeters, from rotary field indicators to ammeters. Wiha offers exactly the right tool for a wide range of applications.

"The speedE®
PocketDrive is a real all-rounder that I can rely on completely.
Whether large or small screws, powerful or fine - I decide what is needed at the touch of a button. Thanks to its compact size and shadow-free lighting, it supports me in everything I have to do."

Max Buhl





$\textbf{Electric screwdriver speedE}^{\$} \, \textbf{PocketDrive}$















with bit I	oox and bag	45791
Order-No	o. 🛍	
45791	1	•••••••••••••••••••••••••••••••••••••••
Fastenin	g / Jamming	
	E-screwdriver handle speedE® PocketDrive	
	31-piece bit box slotted, Phillips, Pozidriv, hexagor TORX®	nal,
	Bit holder magnetic	
Various		
	USB charging cord (type USB-C)	
Storage		
	Softhox	

EN 12100:2011-03, EN 62841-1:2016, EN 62841-2-2:2015, EN 60335-1:2020, EN 60335-2-29:2019, 2011/65/EU, 2014/35/EU, 2014/30/EU, 2006/42/EC.





















	with slimBits, batteries and USB charger in
L Boxx	(Mini 591T10
Order-N	No.
44318	
Fasten	ning / Jamming
₩	Bit Power slimBit electric - SL/PZ2
\ominus	slimBit electric bit Slotted 3.5 mm x 75 mm (41159)
	E-screwdriver handle speedE® II
Variou	S
	Charger for battery type 18500 Li-lon with USB
	Battery set, 18500 Li-ion 2 units in box (41914)







Clamp meter up to 1,000 V AC, CAT IV



Order-No).			
45219				1
V AC min-max	0 - 1000	Hold	Yes	
V DC min-max	0 - 1500	min	Yes	
A AC	400	max	Yes	
A DC	400	CAT	CAT IV 1.000 V	
ΜΩ	40	NCV	Yes	
;D=	Yes	INSIDE	Yes	
MHz	5	AVG	Yes	
TRUE RMS	Yes	1))	< 30 Ω	
\P	Yes	l ∢ → l	220	
P	IP 40			

















Digital multimeter up to 1,000 V AC, CAT IV


















incl. 2x AAA batteries			SB25542	
Order-No.			=	
45215			1	
V AC min-max	0 - 1000	max	Yes	
V DC min-max	0 - 1000	M	automatic / manual	
A AC	10	≘ ?	Yes	
A DC	10	L	2x AAA batteries	
ΜΩ	200	*	Yes	
MHz	60		6,000 digits	
J E	-200°C to 1,350°C	F	IP 40	
द्रीॄृृह	0°C - 50 °C	(F 600 mA / 1,000 V ceramic 6.3 x 32 mm and F 10 A / 1,000 V ceramic 6.3 x 32 mm	
EJ !	-10°C - 60 °C	CAT	CAT IV 600 V / CAT III 1.000 V	
-D- test	Yes, up to 2V	\$	2	
REL	Yes	T nn	2000m	
TRUE RMS	Yes	NCV	Yes	
Hold	Yes	capa mF	60	
(1)	Yes	mm⊓	150	
min	Yes			

EN 61010-1, EN 61010-2-033, EN 61010-031, IP40, CE CAT III 1000V / CAT IV 600V

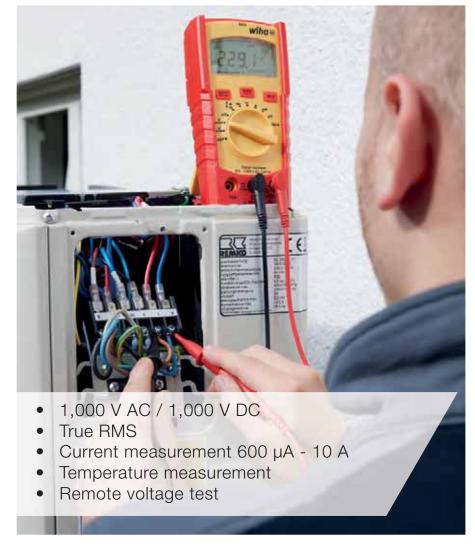



Digital multimeter up to 600 V AC, CAT IV











Order-N	0.		
45218			1
V AC min-max	0 - 600	max	No
V DC min-max	0 - 600	ന	automatically
A AC	10	≘ ?	Yes
A DC	10		2x AAA batteries
ΜΩ	40	₩.	No
MHz	5		4,000 digits
J €	-20 to 500°C	₽	IP 40
K∰E	0°C - 50 °C	C==0	F 400 mA / 600 V ceramic 6.3 x 32 mm and F 10 A / 600 V ceramic 6.3 x 32 mm
EJ i	-10°C - 50 °C	CAT	CAT IV 300 V / CAT III 600 V
-D+ test	Yes, up to 2V	₩	2
REL	Yes	<u> </u>	2000m
TRUE RMS	No	NCV	No
Hold	Yes	Capa nF	100
<\)	Yes	l ← → l mm	150
min	No		

EN 61010-1, EN 61010-2-033, EN 61010-031, IP 40, CE, GS CAT III 600V / CAT IV 300V

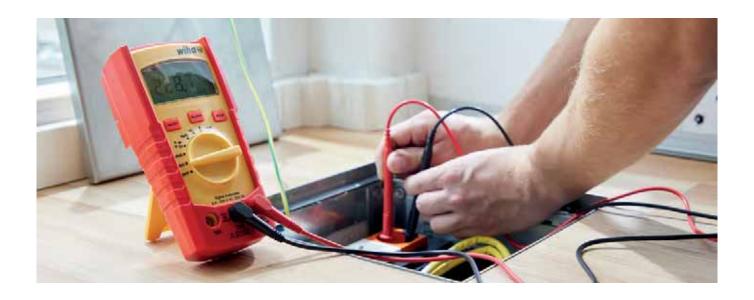

























incl. 2x A	AA batteries		SB25517
Order-No.			
45217		•	1
V AC min-max	0.5 - 1000	P	100 - 1.00 V AC (40 - 70 Hz)
V DC min-max	0.5 - 1500	00	170 - 7,000 V phase to phase AC 40-70 Hz
\$	2	牂	Measuring range 0 - 500 kΩ + 50%
NCV	Yes	LED	> 50 V AC, > 120 V DC
€x>	No	LCD	0.5 V to 1000 V AC, 0.5 V to 1500 V DC
*#	Yes	LCD	0.1 V (< 10 V) and 1 V (> 10 V)
	No	LCD	+/- 3%, +/- 3 digits (< 10 V) and +/- 3%, +/- 5 digits (> 10 V)
) D=	Yes	LCD	OL
RCD	Yes	Ġ '	< 0.5s LED and < 1s LCD
00.00	LED and LCD displays	(1)	< 3.5 mA (at 1,000 V)
* 7	IP 64	Ţ.	30 s ON (operation time), 240 s OFF (recovery time)
\Diamond	LED L, R	ĒD-	about 80 mA
1))	LED and acoustic tone	%	max 85 % RH
ζ¶ŧ	-15°C - 50°C	())	Yes
□	-20°C - 60°C	mm	282
nn T	2000m		

IEC 61243-3:2014, IP64, CE CAT III 1.000V / CAT IV 600V

Voltage and continuity tester 12 - 1,000 V AC, CAT IV















incl. 2x AAA batteries			SB25516
Order-No	0.		
45216			1
V AC min-max	12 - 1000	<u></u>	100 - 700 V AC
V DC min-max	12 - 1500	00	170 - 1,000 V phase to phase AC 50/60 Hz
\$	2	붜	Measuring range 0 - 500 k Ω + 50%
NCV	No	LED	> 50 VAC, > 120 V DC
⟨£x⟩	No	LCD	Χ
*#	No	LCD	Χ
.	No	LCD	Χ
<u>;</u>	Yes	100	Χ
RCD	Yes	Ć'	< 0.5 s at 100% of the nominal value
00.00	LED display	ı	< 3.5 mA (at 1,000 V)
% 7	IP 64	কু	30 s ON (operation time), 240 s OFF (recovery time)
\bigcirc	LED L, R	₽ D	about 80 mA
1))	LED and acoustic tone	%	max 85 % RH
A):	-15°C - 50°C	<\))	Yes
()	-20°C - 60°C	l ∢ → l mm	282
<u></u>	2000m		

IEC 61243-3:2014, IP64, CE CAT II 1.000V / CAT IV 600V







Voltage and continuity tester eMobility 12 -1,000 V AC, CAT IV


















incl. 2x AAA batteries			SB25515	
Order-No).		()	
44319			10	
V AC min-max	12 - 1000	<u> </u>	100 - 700 V AC	
V DC min-max	12 - 1500	00	170 - 1.000V phase to phase	
\$	2	붜	Measuring range 0 - 500 kΩ + 50%	
NCV	No	LED	> 50 VAC, > 120 V DC	
Œx⟩	No	LCD	4-digit LC display	
*#	No	LCD	1 V	
*	Yes	LCD	+/- 3%, +/- 3 digits	
<u>}</u>	No	100	OL	
RCD	No	Ć '	1 s	
00.00	LED and LCD displays	1	< 3.5 mA (at 1,000 V)	
P	IP 64	<u></u>	30 s ON (operation time), 240 s OFF (recovery time)	
\Diamond	LED L, R	₽ D	about 80 mA	
1))	LED and acoustic tone	%	max 85 % RH	
C.J.E	-15°C - 40°C	<\)	Yes	
	-20°C - 70°C	mm	282	
nn T	2000m			

EN 61010-1, EN 61243-3:2014, IP64, CE CAT IV 1.000V

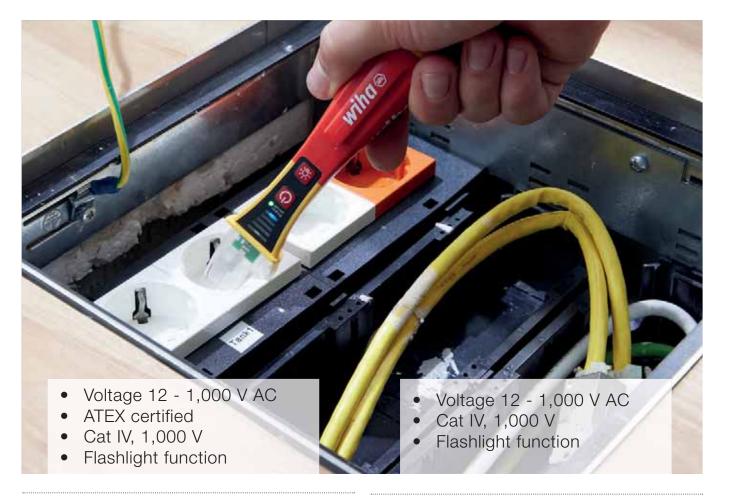

Single-pole, non-contact voltage tester volt detector, explosion protected 12-1,000 VAC















Single-pole, non-contact volt detector, 12-1,000 V AC











incl. 2x AAA batteries			SB2551301
Order-No			
44309			10
	2x AAA batteries	CAT	CAT IV 1.000 V
+	28.5	% 7	IP 67
V AC min-max	12 - 1000	AJ!	-20 - 40°C
NCV	Yes	⟨\)	Yes
⟨£x⟩	Yes	l ∢ → l mm	150
>	Yes		

EN 61010-1, IEC 61326, IP67

incl. 2x AAA batteries			SB25513	
Order-No.				
43797			10	
	2x AAA batteries	CAT	CAT IV 1.000 V	
*	28.5	₽	IP 67	
V AC min-max	12 - 1000	A)!	-20 - 40°C	
NCV	Yes	⟨√⟩)	Yes	
Œx⟩	No	l ∢ → l mm	150	
>	Yes			

EN 61010-1, IEC 61326, IP67 CAT IV 1.000 VAC





Single-pole, non-contact volt detector, 90–1,000 VAC







	incl. 2x AAA batteries SB25514					
Order-No.			=			
43798			10			
	2x AAA batteries	CAT	CAT IV 1.000 V			
÷	28.5		IP 67			
V AC min-max	90 - 1000	A)I	-20 - 40°C			
NCV	Yes	<())	No			
⟨£x⟩	No	l←→I mm	150			
;D=	No					

EN 61010-1, IEC 61326, IP67 CAT IV 1.000 V

Socket tester 230 V AC, CAT II



Continuity tester 400 V AC, CAT II











TypC/TypF

ПÀ

			SB25561
Order-No.			
45220			1
INSIDE	No	V AC max tol	5V
TRUE RMS	230		IP 40
MHz	50	K∭:	-10°C - 50°C
\$	2		-10°C - 50°C
CAT	CAT II 300V	l ← → I mm	93
(*)	300V		

EN 61010-1 (DIN VDE 0411-1), IP40, CE CAT II 300V

incl. 2x A	incl. 2x AAA batteries SB25563					
Order-No.)		
45222			1			
	2x AAA batteries	F	IP 40			
Ω TEXT	Range 1: 0 to 500 kΩ / Range 2: 0 to 10 Ω	1))	LED and beep			
7-	Range 1: < 5 µA / Range 2: < 20 mA	ζ¶i	0°C - 40°C			
③	400 V AC / DC (30s)	<\))	Yes			
>Ω	0 - 500 kΩ and 0 - 10 Ω	☆	Yes			
(U) Auto on	Yes	l 4 → l mm	93			

EN 61010-1, IP40, CE CAT II 400V







Rotational field indicator 100 - 700 V AC, CAT IV











			SB25562
Order-No.			
45221	-		1
INSIDE	No	③	600V
V AC min-max	100 - 700	₽	IP 40
V DC min-max	100 - 700	()	LED R, L
(3)	3.5	A)	0°C - 40°C
ΤŢ	400	<u>T</u> nn	2000m
į.	3	1	LED L1, L2, L3
\$	2	⚠	LED warning
\ \$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Yes	=	100V - 700V
CAT	CAT IV 600 V	l≪ → l mm	93

IEC/EN 61010-1, IEC/EN 61577-7, IEC/EN 611010-031, IP40 CAT IV 600V



Flashlight with LED, laser and UV light













in	blister	pack.	including	3	AAA	batteries

in blister pack, including 3 AAA batteries						24670
Order-No.	LED	*	UV		SB	
41286	100 - 310 lm	Class 2	390 - 400 nm	3x AAA batteries	X	5











Floodlight rechargeable 30 W, 3,000 lm












			45698
Order-N	0.	•	
45698		-	1
LED	750 - 3000 lm	0	No
# mAh	4400 mAh	- <u>;</u> D-	70 m
<u>-</u> ;	13 h	<i>Ŷ</i>	No
O IP	IP54	-0.5m	5000 Lux
À iK	IK07	*	6500 Kelvin
K∭!	-10 - 30°C	6€% CRI	• Ra > 70
₽V	7.4 V	Î	USB-C
?	Low COB-LEDMedium COB-LEDHigh COB-LED	Ū,	6 h
Wh	30 w/h	l - → l mm	180 mm

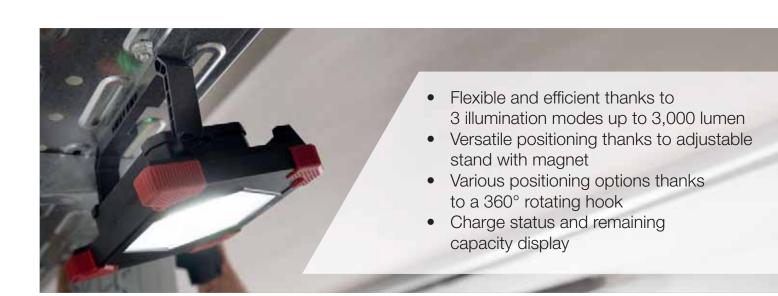





Headlamp 500 lm











Order-N	Ω		45700
45700			1
LED	140 - 500 lm	0	No
mAh	2000 mAh	÷DD	69 m
<u>-</u> °	10 h	☆	Yes
O IP	IPx6	-0.5m	4700 Lux
∕ ik	IK07	€7à cri	• ≥ 90 Ra
ζ¶:	-10 - 25°C		USB-C
₽ V	3.7 V	Ū,	3 h
☆	Low SMD-LEDHigh SMD-LEDLow COB-LEDHigh COB-LED	**	4000 - 6500 Kelvin
Wh	7.4 w/h	l ←→ l mm	87 mm

Handlamp 1,200 lm












			45699
Order-N	0.		
45699			1
LED	80 - 1200 lm	0	No
∳ mAh	2000 mAh		50 m
<u>:</u> @	10 h	- ♦	Yes
O IP	IPx3		2500 Lux
∕ iK	IK07	*	5500 Kelvin
AJ:	-15 - 25°C	€ CRI	 COB: ≥ 70 Ra SMD: ≥ 65 Ra
₽ V	3.7 V		USB-C
☆	Low COB-LEDMedium COB-LEDHigh COB-LEDSpot SMD-LED	Ū,	3 h
Wh	7.4 w/h	l < → I mm	115 mm

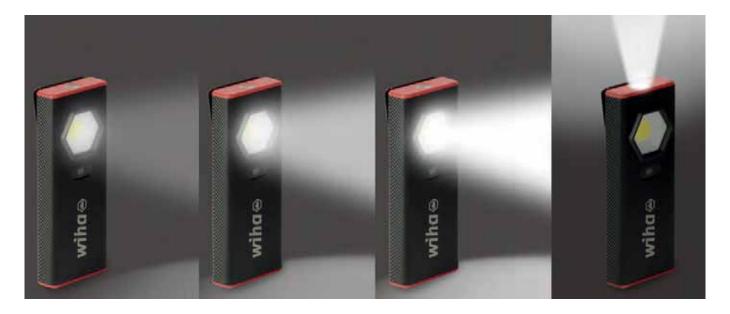



Handlamp 800 lm











			4570
Order-N	0.		(=
45701	-	-	
LED	60 - 800 lm	0	No
mAh	1200 mAh	÷D-	42 m
.;⊕	11 h	- ♦	No
O IP	IPx5		1800 Lux
∕ ik	IK07	*	6000 Kelvin
ζ¶:	-10 - 25°C	€ CNI	 COB: ≥ 80 Ra SMD: ≥ 70 Ra
₽ V	3.7 V		USB-C
<u>*</u>	Low COB-LEDMedium COB-LEDHigh COB-LEDSpot SMD-LEDBoost COB-LED		4 h
Wh	4.44 w/h	l ∢ → l mm	97 mm








Screwdrivers

We have the know-how at the tip of our fingers.

The ergonomic quality of a tool is never quite so apparent as when fastening and clamping. Under the motto "A grasp on turning" Wiha presents an innovative handle size concept which breaks new ground in terms of individual user comfort. Many commonly available screwdrivers are not designed to meet the needs of users. This results in disadvantages in guiding the tool as well as in transmitting force while fastening. In contrast, the- Wiha SoftFinish® concept works with four different handle sizes: Thus, each handle has a perfectly correlated ratio of guidance, speed and torque for any task. With SoftFinish, Wiha became the world's first and only hand tool manufacturer to have products honoured with the renowned AGR quality seal - a seal of approval accepted by medical professionals and officially recommended by doctors and therapists. Wiha screwdrivers featuring SoftFinish are available for dry applications, damp and oily applications and as VDE-certified, insulated screwdrivers for use when working on live parts.

Wiha screwdrivers - for handicraft, industry, electrics and model-making

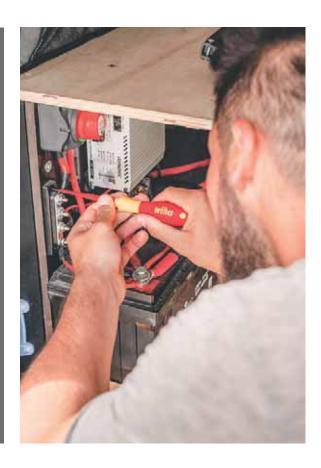






















Mixed, 19	-pcs. incl. folding bag	2831T18
Order-No.	=	
41231	1	-
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby	
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits	
\ominus	1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / 1 x 5 x 75 mm	5.5 mm
+	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
₩	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm	
₩	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm	
•	1 x T9 x 75 mm / 1 x T10 x 75 mm / 1 x T15 x 75 i x T20 x 75 mm	mm / 1
	1 x 3.0 mm x 75 mm / 1 x 4.0 mm x 75 mm / 1 x 5 x 75 mm	5.0 mm
	1 x Folding bag	

Manufactured acc. to IEC 60900.

Mixed, 17-pcs. incl. folding bag		2831T16
Order-No		:
36068		1
0	1 x Screwdriver with bit holder SoftFinish® elestimVario for slimBits	ectric
\ominus	1 x 2.5 mm x 75 mm / 1 x 3.0 mm x 75 mm x 75 mm / 1 x 5.5 mm x 75 mm	/ 1 x 4.0 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	***************************************
₩	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm	
(*)	1 x T10 x 75 mm / 1 x T15 x 75 mm / 1 x T2 1 x T25 x 75 mm	0 x 75 mm /
*	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm	
\ominus	1 x Voltage tester SoftFinish® single-pole, 11 Slotted transparent, with push-on clip	0-250 volts
***************************************	1 x Folding bag	
Manufacture	ed acc. to IEC 60900.	


















wiha 🐵

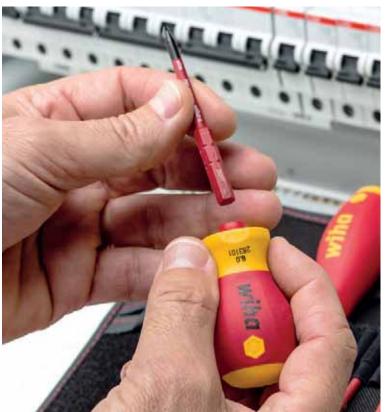

bag	Phillips, Pozidriv, 10-pcs. Incl. folding 2831T901
Order-No	
41232	1
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits
\ominus	1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / 1 x 5.5 mm x 75 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm
₩	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm
***************************************	1 x Folding bag

incl. fol	ding bag	2831T902
Order-No	o. (1
41233		1
0	1 x Screwdriver with bit holder SoftFinish® ele slimVario Stubby	ectric
0	1 x Screwdriver with bit holder SoftFinish® ele slimVario for slimBits	ectric
\ominus	1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / x 75 mm	1 x 5.5 mm
₩	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm	
₩	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm	
***************************************	1 x Folding bag	



INFOBOX:

Manufactured acc. to IEC 60900.

Manufactured acc. to IEC 60900.

Combination profiles

Slotted, Pozidriv, PlusMinus/Pozidriv, 10-pcs.





- SL/PZ Combination of slotted and Pozidriv
- SL/PH Combination of slotted and Phillips
- SL/PH Optimum for PlusMinus clamping screws
- Reduces slipping out
- Higher torque transmission







Screwdriver with bit holder set slimVario® electric




•	4 pieces with slimBits	SB28310101
Order-No		(=)
41230		5
0	Screwdriver with bit holder SoftFinish® e Stubby	
\ominus	3.5 mm x 75 mm	
①	PH2 x 75 mm	
₩	SL/PZ2 x 75 mm	
Manufactur	ed acc. to IEC 60900.	









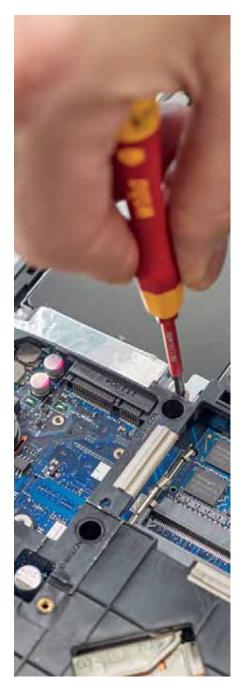



- Expandable and compatible with EVF products
- Access to low-lying screws
- Safe operation up to 1,000 V AC




4-pcs. with slimBits		SB28310401
Order-No		
43167		5
***************************************	Fine screwdriver PicoFinish® slimVa	
\ominus	2.0 mm	
⊕	PH0 x 75 mm	
₩	PZ0 x 75 mm	
Manufactured acc. to IEC 60900.		







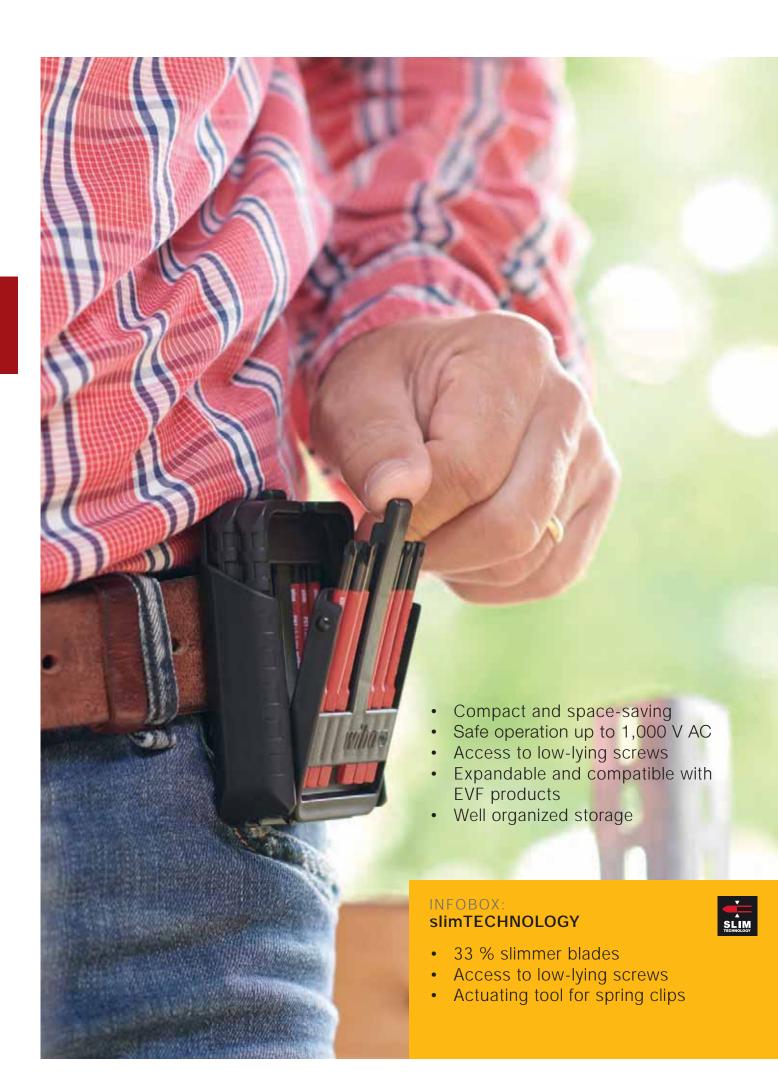

slimBit electric bit set
















TORX®,	TORX PLUS®, 12-pcs. with belt clip	SB2831B950
Order-No		
43161		1
③	1 x T6 x 75 mm / 1 x T7 x 75 mm / 1 x T8 T9 x 75 mm / 1 x T10 x 75 mm / 1 x T15	, , , , , , , , , , , , , , , , , , ,
•	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 1	0IP / 1 x 15IP
***************************************	2 x slimBit box	
	1 x Belt holster for slimBit box	
	rding to IEC 60900.	•••••••••••••••••••••••••••••••••••••••

	hillips, Pozidriv, PlusMinus/Pozidriv, -pcs. with belt clip	SB2831B951
Order-No.		
43162		1
Θ	1 x 3.5 mm x 75 mm / 1 x 5.5 mm x 75 mi	m
1	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
₩	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm	
₩	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mr	n
③	1 x T10 x 75 mm / 1 x T15 x 75 mm / 1 x 1 x T25 x 75 mm	T20 x 75 mm /
	2 x slimBit box	
***************************************	1 x Belt holster for slimBit box	•

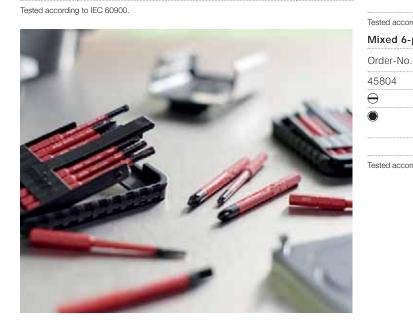

TORX®, 6-	pcs.	SB2831B501
Order-No.		
43153	1	
•	1 x T8 x 75 mm / 1 x T9 x 75 mm / 1 x T10 x T15 x 75 mm / 1 x T20 x 75 mm / 1 x T25 x 7	
	1 x slimBit box	
Tested accordi	ng to IEC 60900.	
Hex, 6-pc	s.	SB2831B801
Order-No.]
43156	1	
	1 x 2.0 mm x 75 mm / 1 x 2.5 mm x 75 mm / x 75 mm / 1 x 4.0 mm x 75 mm / 1 x 5.0 mm x 6.0 mm x 75 mm	
***************************************	1 x slimBit box	
Tested accordi	ng to IEC 60900.	
Slotted, P	hillips 6-pcs.	SB2831B902
Order-No.)
43159	1	
Θ	1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / x 75 mm / 1 x 6.5 mm x 75 mm	1 x 5.5 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
	1 x slimBit box	***************************************
Tested accordi	ng to IEC 60900.	
Mixed 6-p	cs.	SB2831B906
Order-No.		1

Tested according to IEC 60900.

1 x 6.5 mm x 75 mm

1 x slimBit box

1 x 2.5 mm x 75 mm / 1 x 3.0 mm x 75 mm / 1 x 4.0 mm x 75 mm / 1 x 5.0 mm x 75 mm / 1 x 6.0 mm x 75 mm







German Campaign for Healthier Backs



Screwdriver set SoftFinish® electric slimFix



Screwdriver set SoftFinish® electric slimFix



















assorted	l 12-pcs.	3201K12
Order-No		
41003		1
Θ	3.5 mm x 100 mm / 4.0 mm x 100 mm 125 mm / 6.5 mm x 150 mm	/ 5.5 mm x
⊕	PH1 x 80 mm / PH2 x 100 mm	•
₩	PZ1 x 80 mm / PZ2 x 100 mm	
₩	SL/PZ2 x 100 mm	
(*)	T15 x 100 mm / T20 x 100 mm / T25 x	125 mm

No slim version Manufactured acc. to IEC 60900.

\circ	
	125 mm / 6.5 mm x 150 mm
(1)	PH1 x 80 mm / PH2 x 100 mm
₩	PZ1 x 80 mm / PZ2 x 100 mm
₩	SL/PZ2 x 100 mm
(*)	T15 x 100 mm / T20 x 100 mm / T25 x 125 mm

Slotted, Phillips 6-pcs. 3201K6 Order-No. 35389 3.5~mm~x~100~mm / 4.0~mm~x~100~mm / 5.5~mm~x125 mm / 6.5 mm x 150 mm \oplus PH1 x 80 mm / PH2 x 100 mm Manufactured acc. to IEC 60900.

Slotted, P	hillips, PlusMinus/Pozidriv 6-pcs.	3201K601
Order-No.	=	
38362	1	•••••••••••••••••••••••••••••••••••••••
Θ	1 x 3.5 mm x 100 mm / 1 x 4.0 mm x 100 mm / 1 5.5 mm x 125 mm	X
⊕	1 x PH1 x 80 mm / 1 x PH2 x 100 mm	
₩	1 x SL/PZ2 x 100 mm	

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs		3201ZK6
Order-No		
36455		1
Θ	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5 125 mm / 6.5 mm x 150 mm	i.5 mm x
₩	PZ1 x 80 mm / PZ2 x 100 mm	
Manufacture	d acc. to IEC 60900.	


	mper Resistant (with hole) 6-pcs.	3251TRK6
Order-No.		(=)
41245		1
♦	T10H x 100 mm / T15H x 100 mm / T25H x 125 mm / T30H x 125 mm / T	

Manufactured acc. to IEC 60900.

TORX® 6-I	pcs.	3251K6
Order-No.	=	
36558	1	
•	T8 x 60 mm / T9 x 60 mm / T10 x 100 mm / T15 x 100 mm / T20 x 100 mm / T25 x 125 mm	

T8 + T9 no slim version Manufactured acc. to IEC 60900.



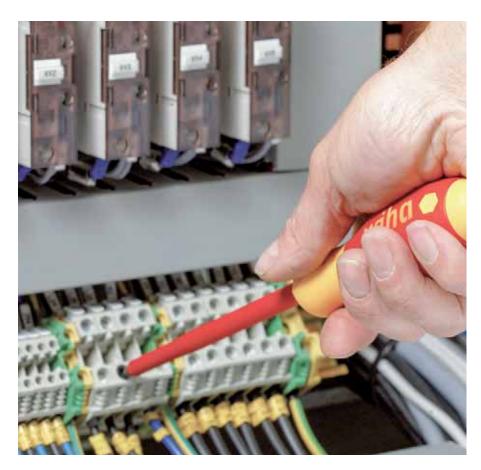



Screwdriver set SoftFinish® electric











Slotted, Phillips 7-pcs.	
Order-No.	()
00834	1
Θ	2.5 mm x 75 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
⊕	PH1 x 80 mm / PH2 x 100 mm
Θ	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip

Slotted, Phillips 6-pcs.			320NK6
Order-No).		
00833		1	•••••••••••••••••••••••••••••••••••••••
Θ	3.0 mm x 100 mm / 4.0 mm x 100 mm 125 mm / 6.5 mm x 150 mm	/ 5.5 mm x	
⊕	PH1 x 80 mm / PH2 x 100 mm		

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs 32		320NZK6SO
Order-No		=
25477	•	1
\ominus	2.5 mm x 75 mm / 3.5 mm x 100 / 5.5 mm x 125 mm) mm / 4.5 mm x 125 mm
₩	PZ1 x 80 mm / PZ2 x 100 mm	

Manufactured acc. to IEC 60900.





Screwdriver set SoftFinish® electric









322K5

Order-No.	⊞
29466	1
0	5.5 mm x 125 mm / 7.0 mm x 125 mm / 8.0 mm x 125 mm / 10.0 mm x 125 mm / 13.0 mm x 125 mm

Manufactured acc. to IEC 60900.



Fine screwdriver set PicoFinish® electric



Slotted, Phillips, 7 pcs. incl. holder		2270PK601
Order-No		
42989		1
\ominus	1 x 1.5 mm x 50 mm / 1 x 2.5 mm x	
Θ	1 x 2.0 mm x 50 mm / 1 x 3.0 mm x	
(1)	1 x PH00 x 50 mm / 1 x PH0 x 65 m	ım
	1 x holder	





Screwdriver set SoftFinish®



assorted	I 12-pcs.	302HK12
Order-No		
41002	1	
\ominus	4.0 mm x 100 mm / 3.5 mm x 100 mm / 6.5 mr 150 mm	n x
*************************************	PH1 x 80 mm / PH2 x 100 mm / PH3 x 150 mm	າ
₩	PZ1 x 80 mm / PZ2 x 100 mm	
③	T15 x 80 mm / T20 x 100 mm / T25 x 100 mm 115 mm	/ T30 x

12_{pcs}





Screwdriver set SoftFinish®









Slotted, P	Phillips 6-pcs.	302HK6SO
Order-No.		
07152		1
\ominus	3.5 mm x 100 mm / 4.5 mm x 125 mn 150 mm / 6.5 mm x 150 mm	n / 5.5 mm x
4	PH1 x 80 mm / PH2 x 100 mm	••••••
Ψ	FITT X 00 IIIIII / FITZ X 100 IIIIII	
	Pozidriv 6-pcs	302ZK6SO
Order-No.		302ZK6SO
Order-No.		302ZK6SO ш
Slotted, P Order-No. 07153		1



TORX® 7-p	ocs. 362K7
Order-No.	∷
01299	1
③	T8 x 60 mm / T9 x 60 mm / T10 x 80 mm / T15 x 80 mm / T20 x 100 mm / T25 x 100 mm / T30 x 115 mm

TORX® 6-µ	OCS. 362K6SO
Order-No.	
07155	1
(*)	T10 x 80 mm / T15 x 80 mm / T20 x 100 mm / T25 x 100 mm / T30 x 115 mm / T40 x 130 mm





Screwdriver set SoftFinish®








Hexagon nut driver 5-pcs.		341K5
Order-No.	H	
01034	1	
0	5.5 mm x 125 mm / 7.0 mm x 125 mm / 8.0 mm x 125 mm / 10.0 mm x 125 mm / 13.0 mm x 125 mm	













530HK6

Slotted, Phillips hexagonal blade and solid steel cap, 6-pcs.

Order-No.		
21250		1
Θ	3.5 mm x 75 mm / 4.5 mm x 90 6.5 mm x 125 mm	mm / 5.5 mm x 100 mm /

PH1 x 80 mm / PH2 x 100 mm





Fine screwdriver set PicoFinish®



7

	Phillips, 7 pcs. incl. holder	260PK601
Order-No		
42990		1
Θ	1.5 mm x 40 mm / 2.0 mm x 40 mm / 2. 3.0 mm x 50 mm	5 mm x 50 mm /
⊕	PH00 x 40 mm / PH0 x 50 mm	
***************************************	holder	

TORX®,	7 pcs. incl. holder	267PK6M01
Order-No		
42997		1
*	T4 x 40 mm / T5 x 40 mm / T6 x 40 mm / T8 x 40 mm / T9 x 50 mm	T7 x 40 mm /
	holder	•

Fine screwdriver set PicoFinish®





	hillips 7-pcs. 260PK	701
Order-No.	≘	
42991	1	
\ominus	1.5 mm x 40 mm / 2.0 mm x 40 mm / 2.5 mm x 50 mm 3.0 mm x 50 mm	/
⊕	PH00 x 40 mm / PH0 x 50 mm / PH1 x 60 mm	





INFOBOX:

PicoFinish

- Sensitive and controlled power transmission
- Permits quick rotation thanks to the rotating cap
- Quick selection of the correct size

Fine screwdriver set PicoFinish® ESD








	Phillips, 7 pcs. incl. holder	270PK601
Order-No		
43707	1	
Θ	1 x 1.5 mm x 40 mm / 1 x 2.0 mm x 40 mm / x 50 mm / 1 x 3.0 mm x 50 mm	1 x 2.5 mm
1	1 x PH0 x 50 mm / 1 x PH00 x 40 mm	
	1 x holder	



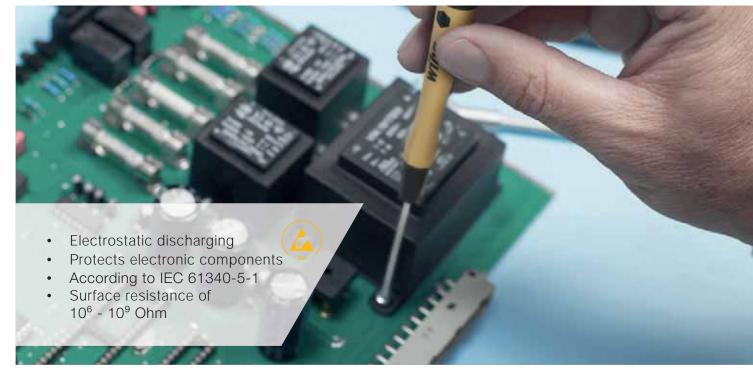





Magnetiser/ Demagnetiser



		SB40010
Order-No.	SB	
02568	Х	5













SoftFinish® universal scraper set



12 pcs




12-pcs.	SB	4304010
Order-No.	€	
26920	1	
	SoftFinish® universal scraper 27.5 mm (23159)	
	Replacement blade set, 13 mm wide 10-pcs. for uni scraper in blister pack (27606)	versal

Screw extractor set



	pcs. with spiral drill bit incl. box	40511
Order-No	/ \	
03988	1	······
Θ	1 x 2.3 / 1 x 2.8 / 1 x 3.4 / 1 x 4.5 / 1 x 5.7 / 1 x 9.0 / 1 x 11	(6.8 / 1 x
	1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm / 1 x 10.0 mr	
	1 x Box	
	I X BOX	



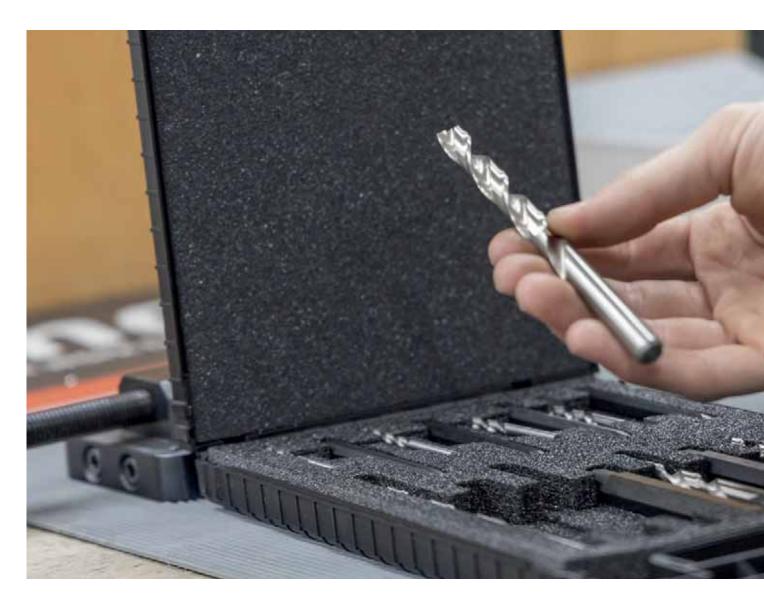















Torque tools

Controlled power for greater security.

The correct torque prevents damage to materials, eliminates the need for retouching and protects against warranty claims. This makes fully certified Wiha torque tools essential for mechanics, electricians and electronics technicians as they combine precision with security: with a release accuracy of ± -6 % for the pre-set scale value, Wiha torque screwdrivers satisfy standard precision requirements. Guaranteed individual item testing using the manufacturer's inspection process and individual item marking with an identification number attest to the high quality and manufacturing standard of the tools.

In most modern industrial and production units today, process and application safety is one of the top objectives. For example, the use of Wiha torque tools during the replacement of reversible plates can prevent follow-up work, prevent material damage, save time and ensure quality.







Torque screwdriver set TorqueVario®-S electric











0,8-5,0 Nm mixed, variably adjustable torque

limit, 19 p	ocs. incl. folding bag	2872T18
Order-No.	=	
36791	1	
0	1 x Torque screwdriver TorqueVario®-S electric v adjustable torque limit	variably
	1 x Setting tool for torque screwdriver with long	handle
0	1 x Adapter TorqueVario-S electric for slimBits	
Θ	1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / 1 x 75 mm / 1 x 6.5 mm x 75 mm	x 5.5 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
\$	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm	
*	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm	***************************************
•	1 x T9 x 75 mm / 1 x T10 x 75 mm / 1 x T15 x 7 x T20 x 75 mm / 1 x T25 x 75 mm	75 mm / 1
	1 x Folding bag	

DIN EN ISO 6789. Manufactured acc. to IEC 60900.






















limit, 14 p	cs. incl. folding bag	2872T13
Order-No.	(ੇ
40674		1
0	1 x Torque screwdriver TorqueVario®-S electri adjustable torque limit	c variably
	1 x Setting tool for torque screwdriver with lo	ng handle
0	1 x Screwdriver with bit holder SoftFinish® ele slimVario for slimBits	ectric
0	Adapter TorqueVario-S electric for slimBits	
\ominus	1 x 2.5 mm x 75 mm / 1 x 3.5 mm x 75 mm / x 75 mm	′ 1 x 5.5 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
₩	1 x PZ1 x 75 mm / 1 x PZ2 x 75 mm	
₩	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm	
	1 x Folding bag	
DIN EN ICO (700	***************************************

DIN EN ISO 6789. Manufactured acc. to IEC 60900.

Torque screwdriver set TorqueVario®-**S electric**



0,8-5,0 Nm PlusMinus/Pozidriv variably adjustable torque limit 5-pcs.

XX2872S3

Order-No.	
38074	1
0	1 x Torque screwdriver TorqueVario®-S electric variably adjustable torque limit
	1 x Setting tool for torque screwdriver with long handle
0	1 x Adapter TorqueVario-S electric for slimBits
₩	1 x SL/PZ1 x 75 mm / 1 x SL/PZ2 x 75 mm

DIN EN ISO 6789. Manufactured acc. to IEC 60900.















- Variably adjustable torque a
- Protects material from damage and follow-up work
- Audible and tactile click signal
- Kind to hands and muscles
- Recommended by doctors and therapists from the German Campaign for Healthier Backs







Torque set easyTorque adapter electric








pcs

for slimBits and slimVario® holder, 5-pcs. 2970185

Order-No. 41479 5

O 1 x 0.8 Nm / 1 x 2.0 Nm / 1 x 2.5 Nm / 1 x 2.8 Nm / 1 x 4.0 Nm

Manufactured acc. to IEC 60900.







- Variably adjustable torque a
- Protects material from damage and follow-up work
- Audible and tactile click signal
- Kind to hands and muscles
- Recommended by doctors and therapists from the German Campaign for Healthier Backs



Torque screwdriver set TorqueVario®-S









	m mixed, 14 pcs., variably adjustable nit incl. box	2852S10
Order-No.		
26893	1	
0	1 x Torque screwdriver TorqueVario®-S variably adju torque limit / 1 x Bit holder clamping with ball for to screwdriver with long handle	
	1 x Setting tool for torque screwdriver with long han	ıdle
⊕	1 x PH1 / 1 x PH2	
₩	1 x PZ1 / 1 x PZ2	
③	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
	1 x 3.0 mm / 1 x 4.0 mm	

DIN EN ISO 6789.

1 х Вох

Order-No.		
34614		1
0	1 x Torque screwdriver TorqueVario®-S var torque limit / 1 x Bit holder clamping with I screwdriver with long handle	, ,
	1 x Setting tool for torque screwdriver with	long handle
•	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15	;
•	1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x	15IP
***************************************	1 x Box	



Torque screwdriver with T-handle set TorqueVario®-S T





Order-No.	
29234	1
0	1 x Torque screwdriver with T-handle TorqueVario®-S T 5-14 Nm variably adjustable torque limit

5-14 Nm mixed, 12 pcs., variably adjustable torque limit incl.box $\,$

1 x Setting tool for torque screwdriver with T-handle 1 x 1/4" 1 x 3/8" 1 x Bit holder for torque screwdriver with T-handle

2893S01

1 x T25 / 1 x T30 / 1 x T40 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm 1 х Вох

DIN EN ISO 6789.






















	1	4
ı		pcs

0,4-1,0 Nm assorted, variably	adjustable	torque
limit, 14-pcs, incl. box		

200201	2
788751	.5

1
1 x Torque screwdriver TorqueVario®-S ESD variably adjustable torque limit / 1 x Bit holder clamping with ball for torque screwdriver with long handle
1 x Setting tool for torque screwdriver with long handle
1 x Bit Standard 25 mm Slotted 4,0 mm
1 x 4.5 mm
1 x PH0 / 1 x PH1
1 x PZ0 / 1 x PZ1
1 x T4 / 1 x T5 / 1 x T6 / 1 x T8
1 x Box


DIN EN ISO 6789. IEC 61340-5-1.

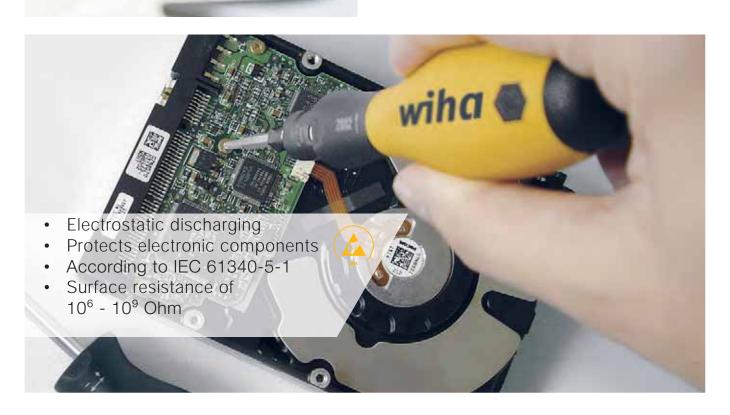


Overview of torque tools

Tools	Precision	Setting	Special feature	Nm range	Torque range				
					0,01 Nm	0,1 Nm	1 Nm	10 Nm	20 Nm
TorqueVario®-S	± 10 %	•••••		0,04 - 0,46					
	± 6 %/± 10 %			0,1 - 0,6					
		variable	Numeric scale	0,4 - 1,0					
		variable	Numeric Scale	0,5 - 2,0					
	± 6 %			0,8 - 5,0					
				2,0 - 7,0				** ** ** ** ***	
TorqueVario®-S ESD	± 10 %			0,04 - 0,46					
MC with a little of	± 6 %/± 10 %		505 " .	0,1 - 0,6					
		variable	ESD-compilant Numeric scale	0,4 - 1,0					
	± 6 %		ramono ocaro	0,5 - 2,0					
				0,8 – 5,0		00 + 00		**********	
easyTorque adapter	. 100/	fixed	VDE certification	5 versions					
about today	± 10%	fixed	Permanently preset in factory	0,8 - 4,0					
TorqueVario®-S VDE	•••••••••••	***************************************		0,5 – 2,0	*****************************				
	± 6 %	variable	VDE certification Numeric scale	0,8 - 5,0					
				2,0 - 7,0					
TorqueVario®-S T									
	± 6 %	variable	Numeric scale	5,0 - 14					



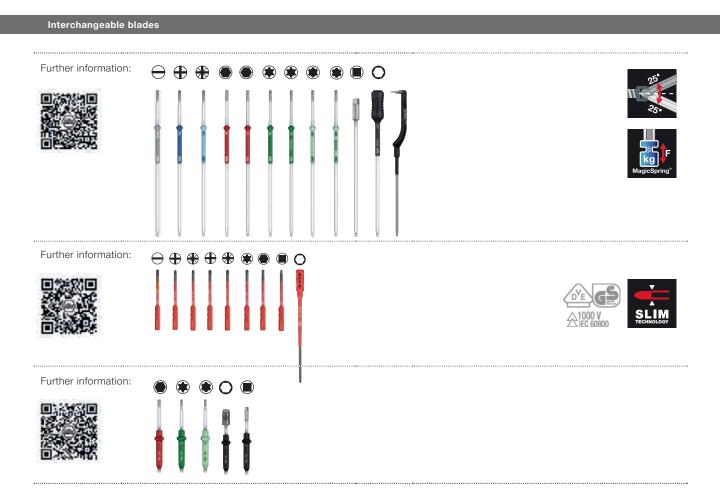

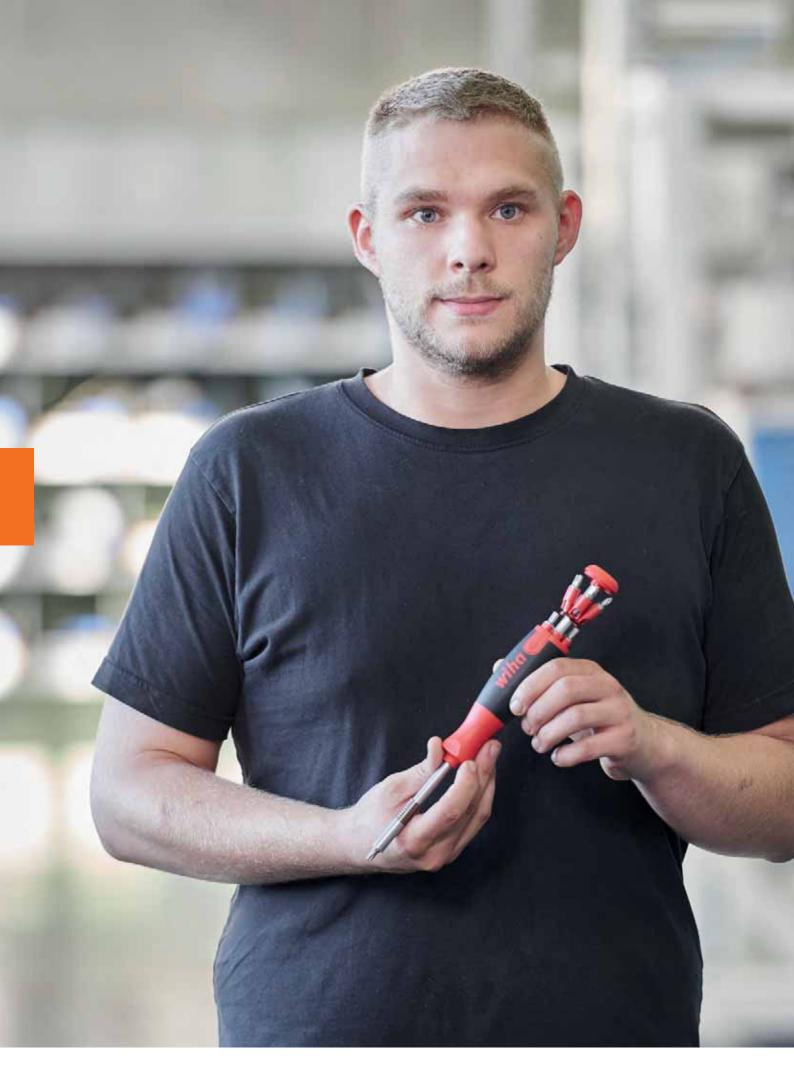



Multitools

Many talents in the minimum space.

Less tools mean lighter loads, better handling and efficient work. Therefore, the more functions a single tool offers, the better: Wiha multitools are compact, versatile tools that save space and ensure lighter loads, making them the perfect companion, particularly for mobile use. In the Wiha magazine bit holder LiftUp, the most commonly used bits are neatly stored in the handle, ensuring they are always ready for use and easy to handle. The PocketMax® can additionally be carried directly in a shirt or trouser pocket. The Wiha reversible blade system offers a variety of interchangeable blades, the lengths of which can be adjusted as required. The small, compact Wiha PocketStars contain the most commonly used L-keys – indispensable helpers for all equipment. The Wiha Stubby magazine combines six drive formats in one, allowing excellent access to all many confined spaces thanks to its extremely short screwdriver handle. With the multitools from Wiha you are excellently prepared for a multitude of applications.

Multitools are portable all-rounders for when you are out on the road, no matter where you take off from.







- 33 % slimmer blades
- Access to low-lying screws
- Actuating tool for spring clips





Screwdriver with bit magazine LiftUp electric













Slotted, P	hillips with 6 slimBits pack	SB283109020
Order-No.		
38612		5
Θ	1 x 2.5 mm x 75 mm / 1 x 3.0 mm x 75 mr x 75 mm / 1 x 5.5 mm x 75 mm	m / 1 x 4.0 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
Manufactured	acc. to IEC 60900.	
Phillips, P	lusMinus/Pozidriv, slotted with 6	
slimBits		SB283109021
Order-No.		
38613		5
\ominus	1 x 3.0 mm x 75 mm / 1 x 4.0 mm x 75 mr x 75 mm	m / 1 x 5.5 mm
⊕	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	

30012		5
Θ	1 x 2.5 mm x 75 mm / 1 x 3.0 mm x 75 x 75 mm / 1 x 5.5 mm x 75 mm	5 mm / 1 x 4.0 mm
1	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
Manufactured	acc. to IEC 60900.	
Phillips, F slimBits	PlusMinus/Pozidriv, slotted with 6	SB283109021
Order-No.		
38613		5
\ominus	1 x 3.0 mm x 75 mm / 1 x 4.0 mm x 75 x 75 mm	5 mm / 1 x 5.5 mm
1	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
₩	1 x SL/PZ2 x 75 mm	
Manufactured	acc. to IEC 60900.	

TORX® with 6 slimBits		SB283109022
Order-No.		
41158		5
•	1 x T8 x 75 mm / 1 x T9 x 75 mm / T15 x 75 mm / 1 x T20 x 75 mm /	1 x T25 x 75 mm
	acc. to IEC 40000	

Slotted, P slimBits	ozidriv, PlusMinus/Pozidriv	with 6 SB283109023
Order-No.		
41235		5
Θ	1 x 2.5 mm x 75 mm / 1 x 3 x 75 mm	3.5 mm x 75 mm / 1 x 5.5 mm
₩	1 x PZ1 x 75 mm / 1 x PZ2	x 75 mm
₩	1 x SL/PZ2 x 75 mm	
Manufactured	acc. to IEC 60900	

Screwdriver with bit magazine PocketMax® **electric**













mixed wit	n 4 slimBits	SB283109040
Order-No.	Ĺ	ੇ
45296		1
Θ	1 x 3.5 mm x 75 mm	
**	1 x PH1 x 75 mm / 1 x PH2 x 75 mm	
*	1 x SL/PZ2 x 75 mm	

Tested according to IEC 60900.









Screwdriver with bit magazine LiftUp 26one®









Mixed with	n 13 double bits 1/4" in blister pack	SB380304021
Order-No.	(=:	
43895		1
$\Theta\Theta$	Double bit, slotted/ slotted 4,0/6,0 / Double b Slotted 5,5/6,5	it, Slotted/
$\oplus \oplus$	Double bit, Phillips/Phillips PH0/PH3 / Double Phillips PH1/PH2	bit, Phillips/
* *	Double bit, TORX*/TORX* T6/T8 / Double bit, TORX* T10/T15 / Double bit, TORX*/TORX* T	
*	Double bit, TORX®/TORX® T20/T25	***************************************
₩₩	Double bit, Pozidriv/Pozidriv PZ1/PZ2 / Doubl Pozidriv/Pozidriv PZ0/PZ3	e bit,
	Double bit internal square/internal square #1/a	#2
	Double bit internal hexagon/internal hexagon	3.0/4.0
	Double bit internal hexagon/internal hexagon	5.0/6.0





Screwdriver with bit magazine Stubby







Mixed wi	th 7 double bits	SB380201
Order-No.)
43613	Ę)
$\Theta\Theta$	Double bit, slotted/ slotted 4,0/6,0	
# #	Double bit, Phillips/Phillips PH1/PH2	
₩₩	Double bit, Pozidriv/Pozidriv PZ1/PZ2	
lacktriangle	Double bit internal hexagon/internal hexagon (3.0/4.0
lacktriangle	Double bit internal hexagon/internal hexagon (5.0/6.0
*	Double bit, TORX®/TORX® T10/T15	
*	Double bit, TORX*/TORX* T20/T25	







Screwdriver with bit magazine LiftUp 25 magnetic









assorted with 12 bits, 1/4"		SB380302020	
Order-N	lo.		
38605		5	
\ominus	1 x 4.5 mm / 1 x 6.5 mm		
⊕	1 x PH1 / 1 x PH2 / 1 x PH3		
₩	1 x PZ1 / 1 x PZ2 / 1 x PZ3		
*	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30		

assorte	ed with 12 bits, 1/4"	SB380302021
Order-No		
38606		5
\ominus	1 x 5.5 mm	
(1)	1 x PH2	
₩	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
(*)	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	
	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm	

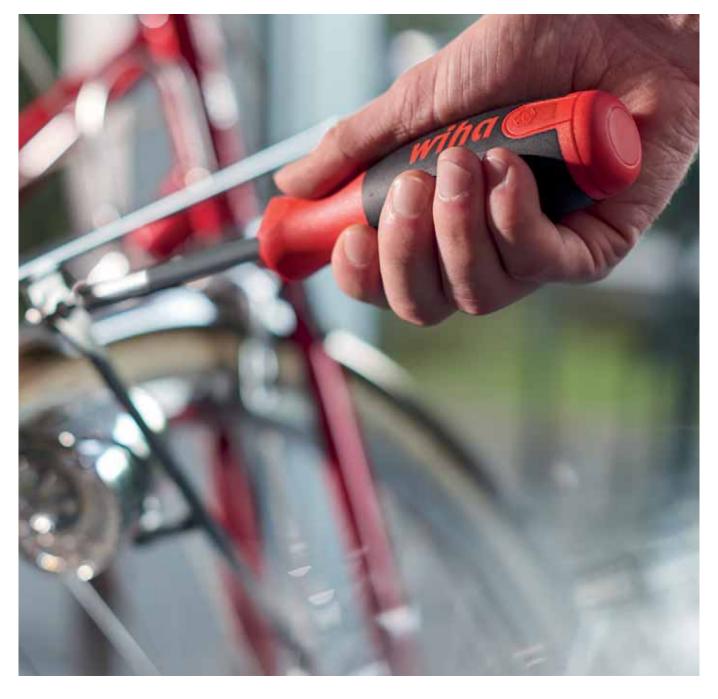














	h 8 bits, 1/4"	SB3803050
Order-No.		
45292		1
\ominus	1 x 4.5 mm / 1 x 6.5 mm	
1	1 x PH1 / 1 x PH2	
₩	1 x PZ1 / 1 x PZ2	
	1 x T15 / 1 x T20	



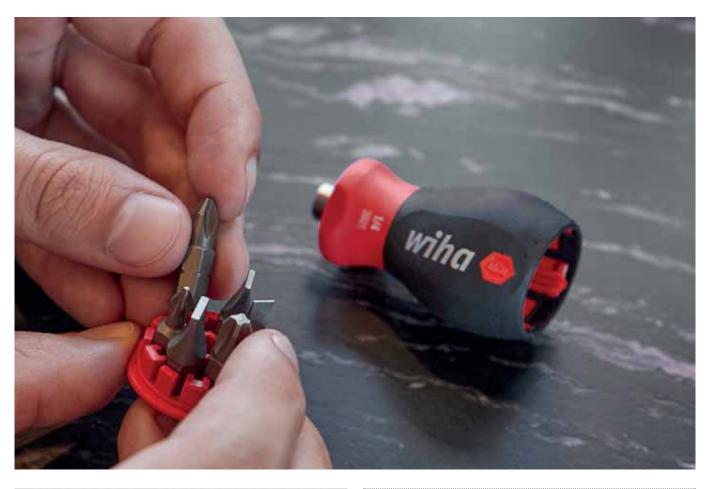



Screwdriver with bit magazine magnetic







Phillips s	slotted with 6 bits, Stubby, 1/4"		SB380101
Order-No.		()	
33738		5	
\ominus	1 x 4.5 mm / 1 x 6.5 mm / 1 x 8.0 mm		
⊕	1 x PH1 / 1 x PH2 / 1 x PH3		
Pozidriv,	Phillips with 6 bits, Stubby, 1/4"		SB380102
Order-No.			
33741		5	
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	***************************************	
₩	1 x PZ1 / 1 x PZ2 / 1 x PZ3		
TORX® w	rith 6 bits, Stubby, 1/4"		SB380103
Order-No.		()	
33744		5	
(2)	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1	v T30 /	1 v T/10







Screwdriver with interchangeable blade set **SYSTEM 6**







assorted	12-pcs. incl. roll-up bag	281T11
Order-No.	€	
03591	1	
0	1 x Screwdriver handle SoftFinish®-telescopic fo 6 interchangeable blade	r SYSTEM
$\Theta\Theta$	1 x 4.0 mm, 6.0 mm, 150 mm / 1 x 5.5 mm, 6.5 150 mm	mm,
#	1 x PH1, PH2, 150 mm	
₩₩	1 x PZ1, PZ2, 150 mm	
	1 x 4.0 mm, 4.0 mm, 150 mm / 1 x 5.0 mm, 5.0 150 mm / 1 x 6.0 mm, 6.0 mm, 150 mm	mm,
* *	1 x T10, T15, 150 mm / 1 x T20, T25, 150 mm / T40, 150 mm	′ 1 x T30,
	1 x roll-up bag	
With ball end		



Screwdriver with interchangeable blade set SYSTEM 4



assorted	12-pcs incl. roll-up bag	269T1101
Order-No.		
27820	1	
0	1 x Screwdriver handle SoftFinish®-telescopic 4 interchangeable blade	for SYSTEM
$\Theta\Theta$	1 x 1.5 mm, 3.0 mm, 120 mm / 1 x 2.0 mm, 3 120 mm / 1 x 2.5 mm, 4.0 mm, 120 mm	.5 mm,
#	1 x PH000, PH00, 120 mm / 1 x PH0, PH1, 12	20 mm
*	1 x T6, T8, 120 mm / 1 x T7, T9, 120 mm	
	1 x 1.5 mm, 1.5 mm, 120 mm / 1 x 2.0 mm, 2 120 mm / 1 x 2.5 mm, 2.5 mm, 120 mm	.0 mm,
	1 x roll-up bag	


















- Variably adjustable blade length (18 90 mm)
- Extensive, exchangeable blade range
- Quick blade replacement
 Maximum flexibility: combine, extend, reconnect

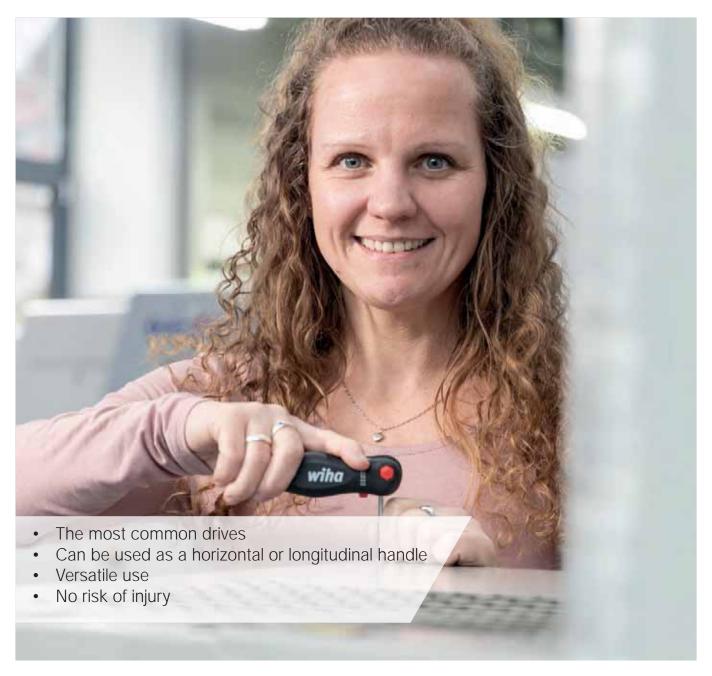





Multitool PocketStar



Hex, 7-pc	s.	SB351PG7
Order-No.		
23041		5
	hexagon Blade 2 / hexagon Bl hexagon Blade 4 / hexagon Bl hexagon Blade 8	, 0

7

Multitool PocketStar



нех, 7-рс	S. SB351PK/
Order-No.	(1)
23037	5
•	hexagon Blade 1,5 / hexagon Blade 2 / hexagon Blade 2,5 / hexagon Blade 3 / hexagon Blade 4 / hexagon Blade 5 / hexagon Blade 6

7

Multitool PocketStar



TORX®,	3-pcs.	SB363P8
Order-No		
23049		5
*	TORX® Blade T9 / TORX® Blade T10 / TOF TORX® Blade T20 / TORX® Blade T25 / TO / TORX® Blade T30 / TORX® Blade T40	



Screwdriver with interchangeable blade set SYSTEM 4 ESD












assorted	12-pcs incl. roll-up bag	2691T11ESD
Order-No.	<u>(</u>	
31499	-	1
0	1 x Screwdriver handle SoftFinish®-telescopic SYSTEM 4 interchangeable blade	ESD for
$\Theta\Theta$	1 x 1.5 mm, 3.0 mm, 120 mm / 1 x 2.0 mm, 120 mm / 1 x 2.5 mm, 4.0 mm, 120 mm	3.5 mm,
+ +	1 x PH000, PH00, 120 mm / 1 x PH0, PH1,	120 mm
*	1 x T6, T8, 120 mm / 1 x T7, T9, 120 mm	
	1 x 1.5 mm, 1.5 mm, 120 mm / 1 x 2.0 mm, 120 mm / 1 x 2.5 mm, 2.5 mm, 120 mm	2.0 mm,
***************************************	1 x roll-up bag	









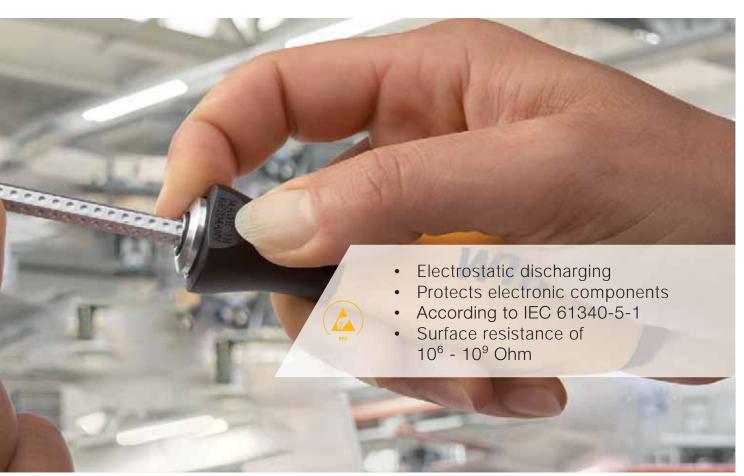





L-keys Difficult to access - easily solved.

Wiha L-keys are essential for all users who are faced with a screw fastening task in difficult work conditions. Wiha ball-end tools enable fastening at angles of up to 25° per side. The risk of an accident is reduced since the tool does not slip out of the screw. Screws made of steel and non-magnetic materials are securely held in any position with the Wiha MagicRing and MagicSpring. Perfect order and easy handling - the ErgoStar L-key holder provides both: Rotating a single L-key in the holder means that all other keys rotate at the same angle! Keys sitting next to each other no longer need to be disentangled. Instead, all keys are ready for removal with one turn - as fast and easy as never before.

Exceptionally neat. Exceptionally bright.









INFOBOX:


ErgoStar

- Secure fit thanks to innovative clamping
- Quick selection Easy removal
- Well organized storage
- Compact and spacesaving

L-key set in ErgoStar holder



L-key set in ErgoStar holder





















hexagonal ball Magicring® 9-pcs. in luminescent colour in SB-cardboard packaging

SB369RE9F01

Order-No.	
43850	5
	1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x


2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm

MagicRing® from size 3 mm. Based on ISO 2936L. Hexagonal ball end, 9-pcs. in luminescent colour in SB-cardboard packaging

SB369E9F01

Order-No	. (1)
43849	5
	1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm
	1 x ErgoStar holder

Based on ISO 2936L.

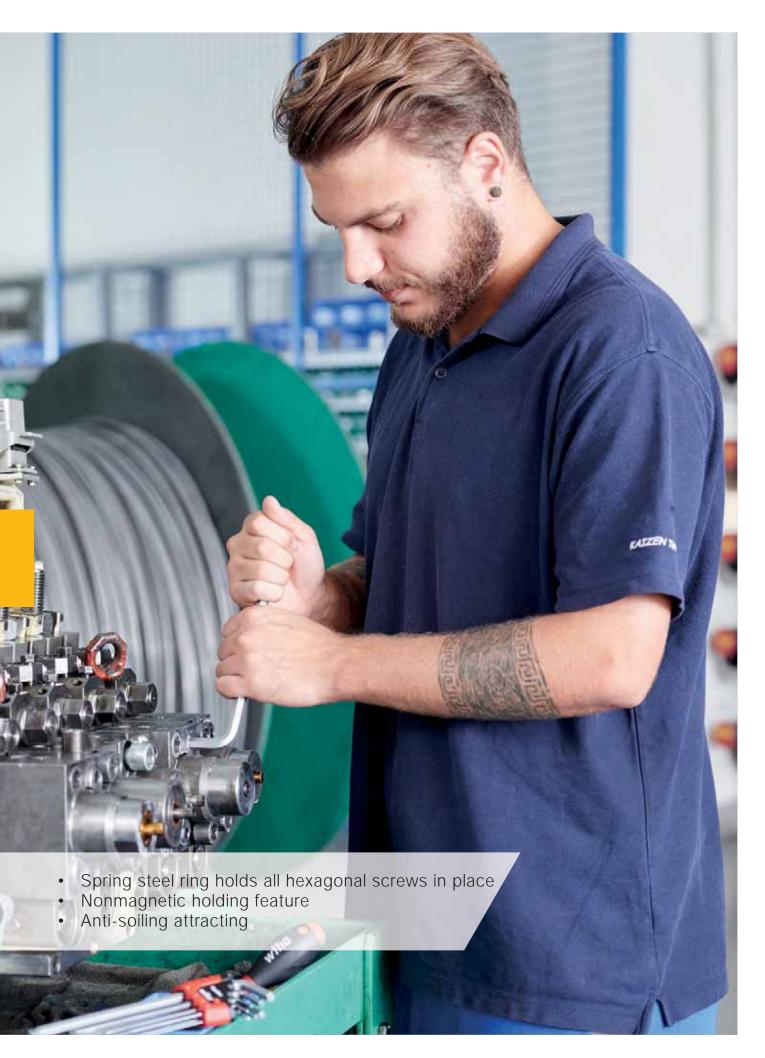





L-key set in ErgoStar holder










MagicRing® hexagonal ball end, 13-pcs. in inch design, matt chrome-plated in SB-cardboard packaging

SB369RHZ1301

Order-No.	
43852	5
	1 x 0,05" x 72 mm / 1 x 1/16" x 80 mm / 1 x 5/64" x 88 mm / 1 x 3/32" x 101 mm / 1 x 7/64" x 111 mm
•	1 x 1/8" x 121 mm / 1 x 9/64" x 136 mm / 1 x 5/32" x 148 mm / 1 x 3/16" x 163 mm / 1 x 7/32" x 176 mm / 1 x 1/4" x 191 mm / 1 x 5/16" x 210 mm / 1 x 3/8" x 232 mm
	1 x ErgoStar holder

Based on ASME B18.3. MagicRing® from 1/8".

L-key set in ErgoStar holder

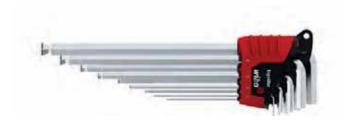



MagicRing® from size 3 mm. Based on ISO 2936L.





Hexagonal ball end MagicRing®, 9-pcs., matt chrome-plated in SB-cardboard packaging


SB369RH901

Order-No.	
43851	5
	1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 mm / 1 x 2.5 mm x 113 mm
•	1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm / 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231 mm
	1 x ErgoStar holder

INFOBOX:

MagicRing[®]

- Spring steel ring holds all hexagonal screws in place
- Nonmagnetic holding feature a
- Anti-soiling attracting b

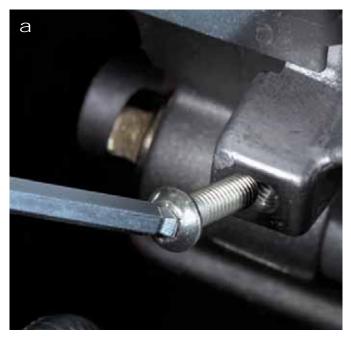

L-key set in ProStar holder

L-key set in Classic holder













Hexagonal ball end, 9-pcs., matt chrome-plated in SB-cardboard packaging		SB369S9
Order-No.		
07192		5
	1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 m 2.5 mm x 113 mm	
•	1 x 3.0 mm x 128 mm / 1 x 4.0 mm x 142 1 5.0 mm x 163 mm / 1 x 6.0 mm x 184 mm 206 mm / 1 x 10.0 mm x 231 mm	
	1 x ProStar holder	

MagicRing® from size 3 mm. Based on ISO 2936L.

Hexagon	al ball end, 9-pcs. black oxidised	SB369H9B
Order-No.		
03992		10
	1 x 1.5 mm x 91 mm / 1 x 2.0 mm x 101 m 2.5 mm x 113 mm / 1 x 3.0 mm x 128 mm 142 mm / 1 x 5.0 mm x 163 mm / 1 x 6.0 r 1 x 8.0 mm x 206 mm / 1 x 10.0 mm x 231	/ 1 x 4.0 mm x mm x 184 mm /
	1 x Classic holder	
Based on ISC	2936L.	







L-key with T-handle set ComfortGrip



Hexagon with side drive, matt chrome-plated 6-pcs. 334DSK6-01		334DSK6-01
Order-No.		
45620		1
	1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 7 6.0 mm / 1 x 8.0 mm	1 x 5.0 mm / 1 x

L-key with T-handle set



Hex in the work bench stand, 7-pcs., brilliant nickel-plated		334VB
Order-No	o. (
00953	1	
	1 x 2.0 mm x 126 mm / 1 x 2.5 mm x 126 mm / 3.0 mm x 126 mm / 1 x 4.0 mm x 176 mm / 1 x 182 mm / 1 x 6.0 mm x 232 mm / 1 x 8.0 mm x	/ 1 x < 5.0 mm x
	1 x Workbench stand	



INFOBOX: MagicSpring®

- Stainless steel spring holds all TORX® / TORX PLUS® screws in place
- Nonmagnetic holding feature a
- Anti-soiling attracting b







L-key set in ErgoStar holder



TORX® MagicSpring®,	13-pcs.,	black	oxidised	in
SB-cardboard packag	ing			

SB366RHZ1301

Order-No.	
43848	5
•	1 x T5 x 72 mm / 1 x T6 x 80 mm / 1 x T7 x 88 mm / 1 x T8 x 101 mm / 1 x T9 x 111 mm / 1 x T10 x 121 mm / 1 x T15 x 136 mm / 1 x T20 x 148 mm / 1 x T25 x 163 mm / 1 x T27 x 176 mm / 1 x T30 x 191 mm / 1 x T40 x 210 mm / 1 x T45 x 232 mm
	1 x ErgoStar holder

MagicSpring® from size T6









L-key set in ErgoStar holder



 $\mathsf{TORX}^{\$}$ ball end, 13-pcs., black oxidised in SB-cardboard packaging

SB366BEHZ1301

Order-No	
43847	5
•	1 x T5 x 72 mm / 1 x T6 x 80 mm / 1 x T7 x 88 mm / 1 x T8 x 101 mm / 1 x T9 x 111 mm / 1 x T10 x 121 mm / 1 x T15 x 136 mm / 1 x T20 x 148 mm / 1 x T25 x 163 mm / 1 x T27 x 176 mm / 1 x T30 x 191 mm / 1 x T40 x 210 mm / 1 x T45 x 232 mm
	1 x ErgoStar holder

TORX® ball end starting from size T9





L-key set in ProStar holder



$\mathsf{TORX}^{\$},\, \mathsf{13\text{-}pcs.},\, \mathsf{black}$ oxidised in SB-cardboard packaging

SB366SZ13

1 3	3
Order-No	
24852	1
•	1 x T5 x 72 mm / 1 x T6 x 80 mm / 1 x T7 x 88 mm / 1 x T8 x 101 mm / 1 x T9 x 111 mm / 1 x T10 x 121 mm / 1 x T15 x 136 mm / 1 x T20 x 148 mm / 1 x T25 x 163 mm / 1 x T27 x 176 mm / 1 x T30 x 191 mm / 1 x T40 x 210 mm / 1 x T50 x 232 mm
	1 x ProStar holder

13_{pcs}





L-key with T-handle set ComfortGrip











TORX® with side drive, matt chrome-plated 6-pcs. 364DSK6-		
Order-No.		
45622		1
•	1 x T10 / 1 x T15 / 1 x T20 / 1 x T2	5 / 1 x T30 / 1 x T40










Bits

The indispensable three.

Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use. Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening wood screws with an angle no greater than 90° between the thread and screw head. The T bit is used for metal screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings. A selection of different bit holders and bit boxes such as the BitBuddy® and XLSelector ensures optimum usage of bits.

The right bit instantly
- Which bit do I need for
this job? Is this all too
familiar to you? We're
putting an end to that!
From now on, choosing
the correct bit is a matter
of seconds.





INFOBOX: BitBuddy 29

- One hand operation a Simple and rapid bit removal b
- Simple return of the bits c
 Compact and space-saving





BitBuddy® TY bit set, 49 mm
























SB7945TY903


		SB7946TY505
Order-No		
42115		6
•	1 x TY-Bit 49 mm TORX® 1/4" T10 / 1 TORX® 1/4" T15 / 2 x TY-Bit 49 mm T TY-Bit 49 mm TORX® 1/4" T25 / 1 x T 1/4" T30 / 1 x TY-Bit 49 mm TORX® 1	I x TY-Bit 49 mm FORX® 1/4" T20 / 1 x FY-Bit 49 mm TORX®
***************************************	1 x BitBuddy®	
DIN 3126, IS	SO 1173, Style E6,3	

TORX® 8-pcs. 1/4" C6,3		SB7945TY505	
Order-No).	(=)	
42136		6	
*	1 x TY-Bit 29 mm TORX* 1/4" T10 / 1 TORX* 1/4" T15 / 2 x TY-Bit 29 mm T0 TY-Bit 29 mm TORX* 1/4" T25 / 1 x T 1/4" T30 / 1 x TY-Bit 29 mm TORX* 1/	ORX® 1/4" T20 / 1 x Y-Bit 29 mm TORX® /4" T40	
0	1 x Bit holder magnetic 60 mm 1/4"ex box	tra strong magnet in	
	1 x BitBuddy®		
DIN 3126, I	SO 1173, Style C6,3		

Phillips, Pozidriv, TORX®, 7-pcs., 1/4" E6,3		SB7946TY903	
Order-No.			
42116		6	
⊕	1 x TY-Bit 49 mm Phillips 1/4" PH2		
₩	1 x TY-Bit 49 mm Pozidriv 1/4" PZ1 / 1 Pozidriv 1/4" PZ2 / 1 x TY-Bit 49 mm P	X 1 1 Dit 17 111111	
*	1 x TY-Bit 49 mm TORX® 1/4" T15 / 1 x TORX® 1/4" T20 / 1 x TY-Bit 49 mm TO		
***************************************	1 x BitBuddy®		
DIN 3126, IS	DIN 3126, ISO 1173, Style E6,3		

Phillips, Pozidriv, TORX®, 8-pcs., 1/4" C6,3		SB7945TY903
Order-No	o.	
42137		6
⊕	1 x TY-Bit 29 mm Phillips 1/4" PH2	
₩	1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x Pozidriv 1/4" PZ2 / 1 x TY-Bit 29 mm Poz	
•	1 x TY-Bit 29 mm TORX® 1/4" T15 / 1 x T TORX® 1/4" T20 / 1 x TY-Bit 29 mm TOR	
0	1 x Bit holder magnetic 60 mm 1/4"extra box	strong magnet in
***************************************	1 x BitBuddy®	



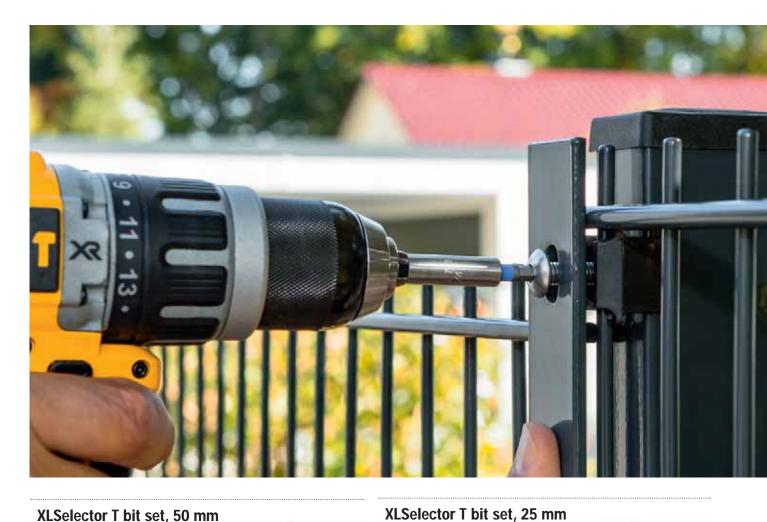

XLSelector T bit set, 50 mm

Phillips, TORX®, hex 13-pcs. 1/4" E6,3





Order-No.







SB7948T950













	_
41831	6
(1)	1 x T-Bit 50 mm Phillips 1/4" PH1 / 1 x T-Bit 50 mm Phillips 1/4" PH2 / 1 x T-Bit 50 mm Phillips 1/4" PH3
(*)	1 x T-Bit 50 mm TORX [®] 1/4" T15 / 1 x T-Bit 50 mm TORX [®] 1/4" T20 / 1 x T-Bit 50 mm TORX [®] 1/4" T25 / 1 x T-Bit 50 mm TORX [®] 1/4" T27 / 1 x T-Bit 50 mm TORX 1/4" T40
	1 x T-Bit 50 mm Hexagon 1/4" 3,0 / 1 x T-Bit 50 mm Hexagon 1/4" 4,0 / 1 x T-Bit 50 mm Hexagon 1/4" 5,0 / 1 x T-Bit 50 mm Hexagon 1/4" 6,0

1 x Bit holder magnetic 58 mm 1/4"

* compared to Wiha standard bit DIN 3126, ISO 1173, Style E6,3

1 x XLSelector

Phillips, TORX $^{\circ}$, hex 31-pcs. 1/4" C6,3

SB7948T999

Order-No.	
41830	6
⊕	2 x T-Bit 25 mm Phillips 1/4" PH1 / 4 x T-Bit 25 mm Phillips 1/4"PH2 / 2 x T-Bit 25 mm Phillips 1/4" PH3
•	2 x T-Bit 25 mm TORX® 1/4" T10 / 2 x T-Bit 25 mm TORX® 1/4" T15 / 4 x T-Bit 25 mm TORX® 1/4" T20 / 2 x T-Bit 25 mm TORX® 1/4" T25 / 2 x T-Bit 25 mm TORX® 1/4" T30 / 2 x T-Bit 25 mm TORX® 1/4" T40
	2 x T-Bit 25 mm Hexagon 1/4" 3,0 / 2 x T-Bit 25 mm Hexagon 1/4" 4,0 / 2 x T-Bit 25 mm Hexagon 1/4" 5,0 / 2 x T-Bit 25 mm Hexagon 1/4" 6,0
0	1 x Bit holder magnetic 58 mm 1/4"
	1 x XLSelector

* compared to Wiha standard bit DIN 3126, ISO 1173, Style C6,3

0





FlipSelector T bit set, 25 mm












Phillips,	Pozidriv, TORX®, 13-pcs., 1/4" C6,3	SB7947T906
Order-No		
41824		6
••	1 x T-Bit 25 mm Phillips 1/4" PH1 / 3 x T- Phillips 1/4"PH2 / 1 x T-Bit 25 mm Phillips	
₩	1 x T-Bit 25 mm Pozidriv 1/4" PZ2	
•	1 x T-Bit 25 mm TORX® 1/4" T10 / 1 x T-B TORX® 1/4" T15 / 1 x T-Bit 25 mm TORX® T-Bit 25 mm TORX® 1/4" T25 / 1 x T-Bit 25 1/4" T30 / 1 x T-Bit 25 mm TORX® 1/4" T40	1/4" T20 / 1 x 5 mm TORX®
0	1 x Bit holder magnetic 60 mm 1/4*extra si box	trong magnet in
	1 x FlipSelector	

* compared to Wiha standard bit DIN 3126, ISO 1173, Style C6,3

INFOBOX:

Wiha TY bit concept

- T bit = Metal screws
- Y bit = Wood screws
- TY bit = Multi-talent
- Quick and easy bit selection





XLSelector Y bit set, 50 mm













XLSelector Y bit set, 25 mm









Phillips, Pozidriv, TORX®	, 13-pcs.,	1/4" E6,3
---------------------------	------------	-----------

SB7948Y95

Order-No.	
41834	6
⊕	2 x Y-Bit 50 mm Pozidriv 1/4" PH2
₩	1 x Y-Bit 50 mm Pozidriv 1/4" PZ1 / 2 x Y-Bit 50 mm Pozidriv 1/4" PZ2 / 1 x Y-Bit 50 mm Pozidriv 1/4" PZ3
•	1 x Y-Bit 50 mm TORX® 1/4" T10 / 1 x Y-Bit 50 mm TORX® 1/4" T15 / 1 x Y-Bit 50 mm TORX® 1/4" T20 / 1 x Y-Bit 50 mm TORX® 1/4" T25 / 1 x Y-Bit 50 mm TORX® 1/4" T30 / 1 x Y-Bit 50 mm TORX® 1/4" T40
0	1 x Bit holder magnetic 58 mm 1/4"
	1 x XI Selector

^{*} compared to Wiha standard bit DIN 3126, ISO 1173, Style E6,3

Phillips, Pozidriv, TORX®, 31-pcs., 1/4" C6,3

SB7948Y90

Order-No	
41832	6
1	1 x Y-Bit 25 mm Phillips 1/4" PH1 / 4 x Y-Bit 25 mm Phillips 1/4" PH2 / 1 x Y-Bit 25 mm Phillips 1/4" PH3
₩	2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 4 x Y-Bit 25 mm Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ3
•	2 x Y-Bit 25 mm TORX* 1/4" T10 / 3 x Y-Bit 25 mm TORX* 1/4" T15 / 3 x Y-Bit 25 mm TORX* 1/4" T20 / 3 x Y-Bit 25 mm TORX* 1/4" T25 / 3 x Y-Bit 25 mm TORX* 1/4" T30 / 2 x Y-Bit 25 mm TORX* 1/4" T40
0	1 x Bit holder magnetic 58 mm 1/4"
•	1 x XLSelector

^{*} compared to Wiha standard bit DIN 3126, ISO 1173, Style C6,3







FlipSelector Y bit set, 25 mm













Phillips, P	ozidriv, TORX®, 13-pcs., 1/4" C6,3	SB7947Y904
Order-No.	Ú	
41827		6
⊕	2 x Y-Bit 25 mm Phillips 1/4" PH2	
₩	1 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 2 x Y-Bi Pozidriv 1/4" PZ2 / 1 x Y-Bit 25 mm Pozidriv	. 20
•	1 x Y-Bit 25 mm TORX® 1/4" T10 / 1 x Y-Bit TORX® 1/4" T15 / 1 x Y-Bit 25 mm TORX® 1, Y-Bit 25 mm TORX® 1/4" T25 / 1 x Y-Bit 25 1/4" T30 / 1 x Y-Bit 25 mm TORX® 1/4" T40	/4" T20 / 1 x
0	1 x Bit holder magnetic 60 mm 1/4*extra stre box	ong magnet in
	1 x FlipSelector	
* compared to	Wiha standard hit	•••••••••••••••••••••••••••••••••••••••

 $^{^{\}star}$ compared to Wiha standard bit DIN 3126, ISO 1173, Style C6,3

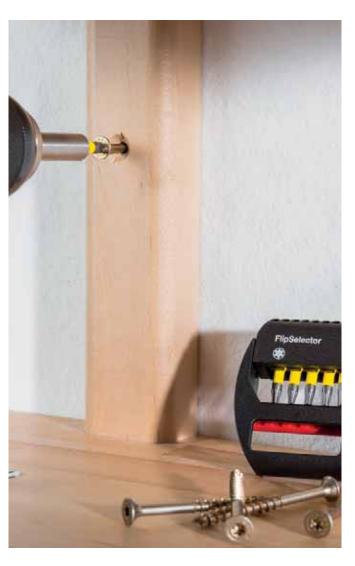



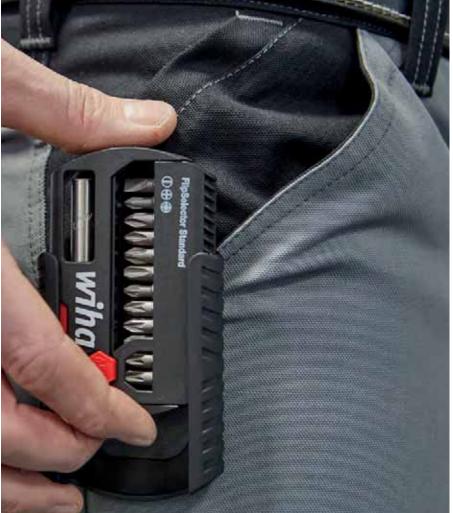





Bit set FlipSelector Standard 25 mm



13_{DCS}

Slotted, Phillips, Pozidriv, 13-pcs., 1/4" with belt	
clip	SB7947005
Order-No.	

Order-No.			
39049		5	•
\ominus	1 x 5.5 mm		•
⊕	1 x PH1 / 3 x PH2 / 1 x PH3		
₩	1 x PZ1 / 4 x PZ2 / 1 x PZ3		
0	1 x Bit holder magnetic 58 mm 1/4"	_	
	1 x Belt clip		
	1 x FlipSelector		

DIN 3126, ISO 1173, Style C6,3


Phillips, P	ozidriv, TORX [®] , 14-pcs., 1/4" with belt clip	SB7947904
Order-No.	É	=
39060		5
1	2 x PH2	
₩	1 x PZ1 / 2 x PZ2 / 1 x PZ3	
(*)	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T;	30 / 1 x T40
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	
DIN 2126 ISC	1172 Style C6 2	

DIN 3126, ISO 1173, Style C6,3

TORX [®] ,	TORX [®] , 14-pcs., 1/4" C6,3 with belt clip	
Order-No		
39056		5
*	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T1 T25 / 1 x T30 / 1 x T40	5 / 2 x T20 / 2 x
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	



Bit set Collector Standard 25 mm





Order-No		
34686	-	5
Θ	1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm	
+	2 x PH1 / 5 x PH2 / 2 x PH3	
₩	2 x PZ1 / 5 x PZ2 / 2 x PZ3	
③	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x	Г30 / 1 х Т40
	1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm	
0	1 x Bit holder CentroFix Force mechanically magnetic in box	lockable 1/4",
0	1 x Screwdriver with bit holder SoftFinish® ı	magnetic 1/4"
	1 x Collector Box	





Bit set Collector Standard 25 mm



688	88888	88888888
• witha	-	6688
688	88888	*****
60	888888	***

assorted 61-pcs. 1/4" C6,3 in box		7928923
Order-No		1
07943	5)
\ominus	1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm / 1 x 8	.0 mm
①	7 x PH1 / 13 x PH2 / 3 x PH3	
₩	7 x PZ1 / 13 x PZ2 / 3 x PZ3	
(*)	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30) / 1 x T40
	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6	.0 mm
0	1 x Bit holder CentroFix Force mechanically lo magnetic in box	ckable 1/4",
	1 x Collector Box	





Bit set Standard 25 mm



Micro-bit set ESD



assorted,	31-pcs. 1/4" C6,3 in box	797901
Order-No.	=	
26252	1	•
Θ	1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm	
⊕	2 x PH1 / 6 x PH2 / 1 x PH3	
₩	2 x PZ1 / 6 x PZ2 / 1 x PZ3	•
•	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x	T40
	1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm	
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Bit box	

DIN 3126, ISO 1173, Style C6,3

Mixed 65-pcs. in box 7000Sk			
Order-No.			
39971		1	
Θ	1 x 0.8 mm / 1 x 1.2 mm / 1 x 1.5 mm / 1 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 3 4.0 mm		
	1 x 0.7 mm / 1 x 0.9 mm / 2 x 1.3 mm x 0 1.5 mm / 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3 4.0 mm x 5/32" / 1 x 1/16" / 1 x 5/64" / 1 7/64" / 1 x 1/8" / 1 x 9/64"	.0 mm / 2 x	
•	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T10 / 1 x T15 / 1 x T20	1 x T8 / 1 x T9 /	
•	1 x PL1 / 1 x PL2 / 1 x PL3 / 1 x PL4 / 1 x	PL5 / 1 x PL6	
⊕	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1		
0	1 x 5/64" / 1 x 3/32" / 1 x 7/64" / 1 x 1/8" x 5/32" / 1 x 3/16" / 1 x 7/32" / 1 x 2.0 mr / 1 x 3.0 mm / 1 x 3.5 mm / 1 x 4.0 mm / x 5.0 mm / 1 x 5.5 mm	m / 1 x 2.5 mm	
0	1 x Adapter 1/4" for micro-bits 4 mm		
0	1 x Bit ratchet 90 mm with thumb wheel H 1/4"	exagon head,	
0	1 x Screwdriver handle ESD for micro-bits	4 mm drive	
0	1 x Extension 100 mm for micro-bits form screwdriver ESD	4 mm and Fine	
	1 x Metal Box		

Handle: IEC 61340-5-1 DIN 3126, ISO 1173, Style C4

INFOBOX:

Pentalobe PL



- Security profile for Apple devices Ideal for repair work









High-performance offset screwdriver with quick release holder



1/4" in bli					SB24628
Order-No.	0		mm⊓	max. Nm	
32310	1/4"	1/4"	165	57.0	1

Drive: DIN 3126, ISO 1173, Style E6,3. Suitable for bits DIN 3126, ISO 1173, form C6.3 and E6.3




Offset screwdriver with bit holder magnetic



1/4"					SB24629
Order-No.	0		mm⊓	max. Nm	
32311	1/4"	1/4"	130	14.0	1

Drive: DIN 3126, ISO 1173, Style C6,3. Suitable for bits DIN 3126, ISO 1173, form C6.3 and E6.3



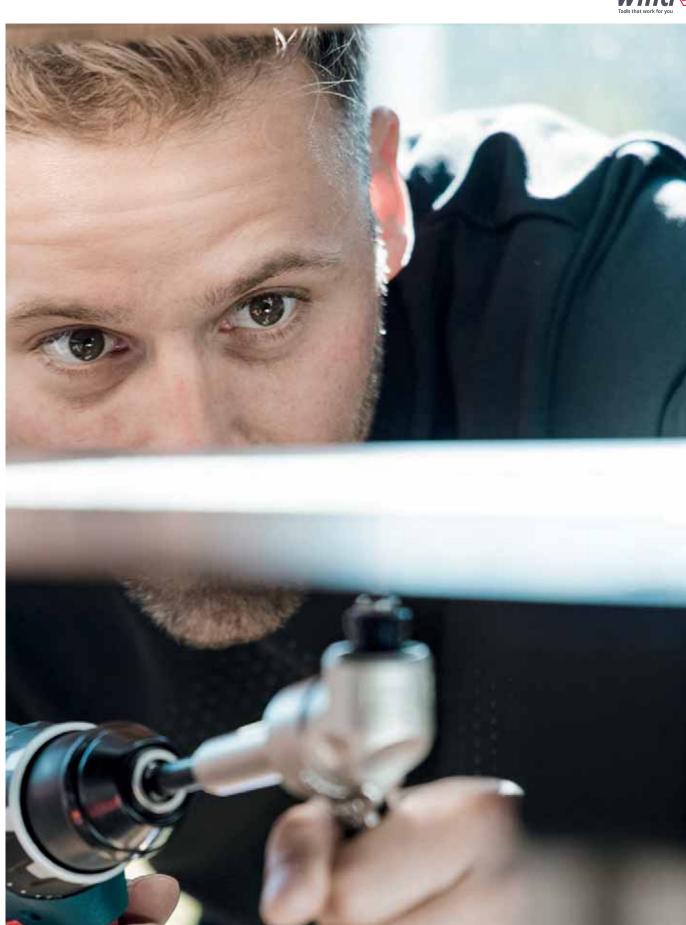







Mechanical Tools Tight fastening – easy opening.

Tightening and installation work requires many different profiles. Wiha offers the right equipment and its insulated ratchet wrench set ensures safe working in the electrical engineering sector. With the various nut driver and bit sets, as well as ring ratchet open-ended spanner sets, screw connections of all types can be easily fastened and opened. The extensive equipment range extends from a SoftFinish® screwdriver with a magnetic b¹t holder, various bits and bit holders, up to ratchet wrenches, extensions, and universal joints. The range is complemented by various ring ratchet open-end spanners. When it comes to flexibility and efficiency, the ratchet wrenches from Wiha are particularly distinguished by a variably selectable rotational direction as well as fine gearing with 72 teeth.

"With the ratchets and spanners from Wiha, I am simply well equipped for all screwing tasks, being for industrial assembly, heating installation or privately on my car."

Norbert Burger

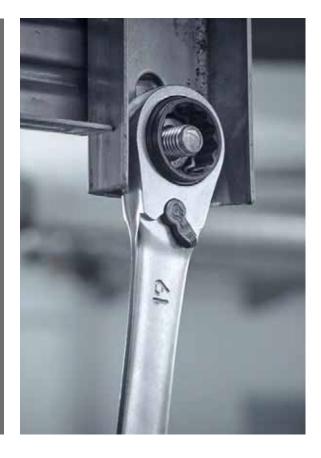

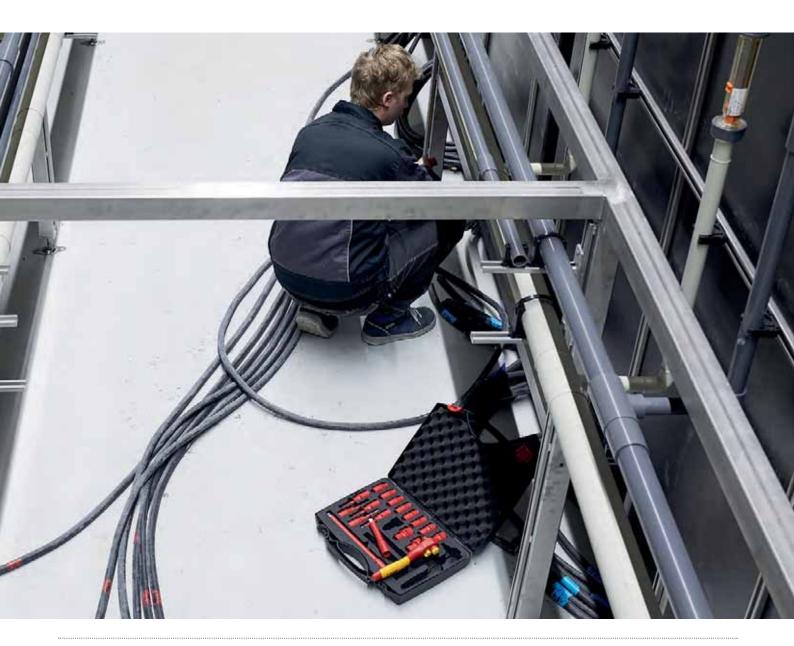

Ratchet wrench set insulated 1/2"



21 pcs



21-pcs. ir	ncl. case 7208NK200
Order-No.	(
43024	
Fastenin	ر / Jamming
	T-handle insulated for nut driver (43063)
	Ratchet wrench insulated for nut drivers Switchable 1/2" (43053)
	Insulated extension 1/2" for nut driver inserts, insulated 125 mm (43055) / 250 mm (43056)
0	Insulated nut driver insert 1/2" hexagon head 10.0 mm x 55 mm (43077) / 11.0 mm x 55 mm (43078) / 12.0 mm x 55 mm (43079) / 13.0 mm x 55 mm (43080) / 14.0 mm x 55 mm (43081) / 17.0 mm x 55 mm (43082) / 19.0 mm x 55 mm (43083) / 22.0 mm x 55 mm (43084) / 24.0 mm x 55 mm (43085) / 27.0 mm x 55 mm (43086) / 32.0 mm x 55 mm (43087)
	Insulated nut driver insert 1/2" hexagon head 4.0 mm x 120 mm (43100) / 5.0 mm x 120 mm (43101) / 6.0 mm x 120 mm (43102) / 8.0 mm x 120 mm (43103) / 10.0 mm x 120 mm (43104)
Storage	

Manufactured acc. to IEC 60900.

case



Ratchet wrench set insulated 3/8"





DIN EN IEC 60900





21-pcs. II	nci. case	7207NK2001		
Order-No.				
43023	-	1		
Fastening	g / Jamming			
	T-handle insulated for nut driver (43062)			
	Ratchet wrench insulated for nut drivers 3/ (43052)	8" switchable		
	Insulated extension 3/8" for nut driver inser 125 mm (43057) / 250 mm (43058)	rts, insulated		
0	Insulated nut driver insert 3/8" hexagon he 8.0 mm x 45 mm (43065) / 10.0 mm x 45 mm (43067) / 12.0 mm x 45 mm (43067) / 12.0 mm x 45 mm (43069) / 14.0 mm x 45 mm (43071) / 17.0 mm x 45 mm (43071) / 17.0 mm x 45 mm (43073) / 19.0 mm x 47 21.0 mm x 47 mm (43075) / 22.0 mm x 47	mm (43066) / mm (43068) / mm (43070) / mm (43072) / mm (43074) /		
•	Insulated nut driver insert 3/8" hexagon he 4.0 mm x 75 mm (43105) / 5.0 mm x 75 m 6.0 mm x 75 mm (43107) / 8.0 mm x 75 m	m (43106) /		
Storage				
	0000			



Ratchet wrench set insulated, 1/4"










21-pcs. ir	1 case 7209NK2001
Order-No.	⊞
43025	1
Fastening	ر / Jamming
	Ratchet wrench insulated for nut drivers 1/4" switchable (43054)
	Insulated extension 1/4" for nut driver inserts, insulated 75 mm (43059) / 150 mm (43060)
0	Insulated nut driver insert 1/4" hexagon head 4.0 mm x 42 mm (43088) / 5.0 mm x 42 mm (43089) / 5.5 mm x 42 mm (43090) / 6.0 mm x 42 mm (43091) / 7.0 mm x 42 mm (43092) / 8.0 mm x 42 mm (43093) / 9.0 mm x 42 mm (43094) / 10.0 mm x 42 mm (43095) / 11.0 mm x 42 mm (43096) / 12.0 mm x 42 mm (43097) / 13.0 mm x 42 mm (43098) / 14.0 mm x 42 mm (43099)
	Insulated nut driver insert 1/4" internal hexagon 3.0 mm x 65 mm (43109) / 4.0 mm x 65 mm (43110) / 5.0 mm x 65 mm (43111) / 6.0 mm x 65 mm (43112) / 8.0 mm x 65 mm (43113)
Storage	
	case

Manufactured acc. to IEC 60900.







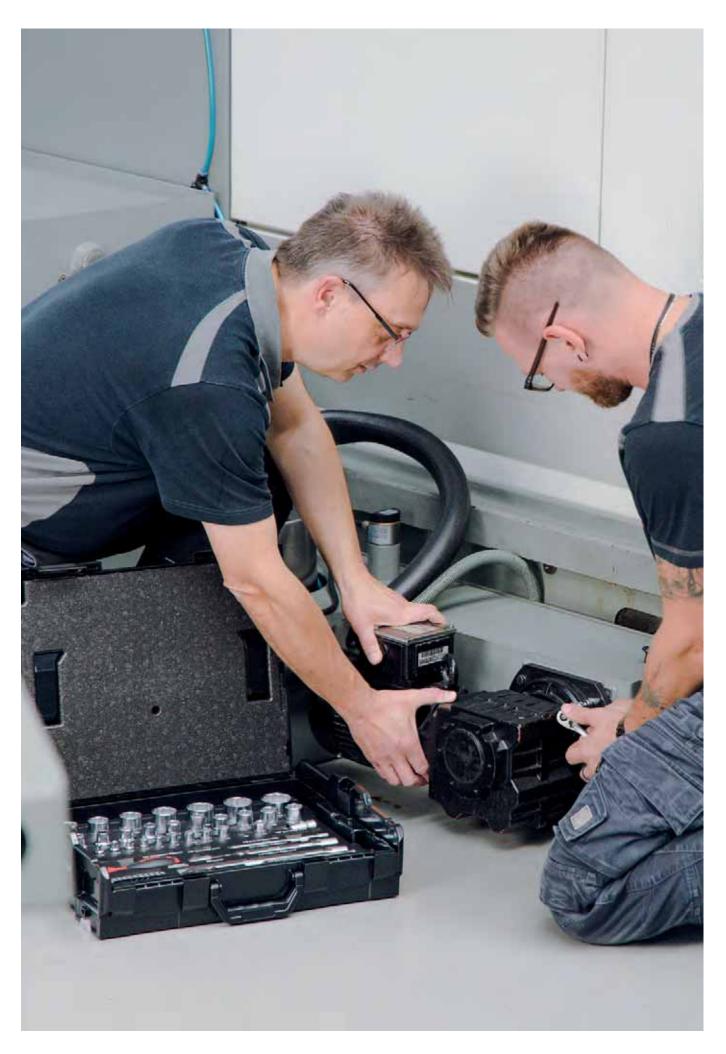





Nut driver and bit set 1/4" and 1/2"














60 pcs. in	cl. L Boxx	33397
Order-No.		
44685		1
Fastening	ر Jamming	
	Ratchet wrench for nut drivers 1/4" switchable 1/4" x 128 mm (44666) / 1/2" x 257 mm (44709)	
0	Nut driver insert 1/4" hexagon head 4.0 mm (446f 5.0 mm (44670) / 5.5 mm (44671) / 6.0 mm (4467 7.0 mm (44673) / 8.0 mm (44674) / 9.0 mm (4467 10.0 mm (44676) / 11.0 mm (44678) / 12.0 mm (44680) / 14.0 mm (44681)	72) / 75) /
0	Nut driver insert 1/2" double hex 10.0 mm (44715) 11.0 mm (44716) / 12.0 mm (44717) / 13.0 mm (410.0 mm (44719) / 15.0 mm (44720) / 16.0 mm (417.0 mm (44722) / 18.0 mm (44723) / 19.0 mm (417.0 mm (41726) / 22.0 mm (41727) / 24.0 mm (417.0 mm (41732) / 30.0 mm (41735) / 32.0 mm (41738)	14718) / 14721) / 14724) / 14729) /
	Extension 1/4" for nut driver inserts 75 mm (4466 150 mm (44668)	7) /
	Extension 1/2" for nut driver inserts 150 mm (447 250 mm (44712)	11) /
® ○	Universal joint with ball Internal square, square he (44682) / 1/2" (44739)	ad 1/4"
0	Screwdriver with bit holder SoftFinish® magnetic 1112 mm (32160)	1/4"
0	Bit holder CentroFix Force mechanically lockable magnetic in box 60 mm (39133)	1/4",
Θ	Bit Standard 25 mm Slotted 1/4" C6,3 4.5 mm (0 5.5 mm (01624) / 6.5 mm (01626)	1623) /
⊕	Bit Standard 25 mm Phillips 1/4" C6,3 PH1 (0165 (01658)	7) / PH2
₩	Bit Standard 25 mm Pozidriv 1/4" C6,3 PZ1 (0168 (01689) / PZ3 (01690)	38) / PZ2
•	Bit Standard 25 mm TORX® 1/4" C6,3 T10 (01710 (01717) / T20 (01718) / T25 (01719) / T27 (01720 (01721) / T40 (01722)	6) / T15)) / T30
•	Bit Standard 25 mm Hexagon 1/4" C6,3 3.0 mm (4.0 mm (01706) / 5.0 mm (01707) / 6.0 mm (01707)	
	Tool shaft with ball Square, Internal hexagon 1/4" (01933)	C6,3

Storage

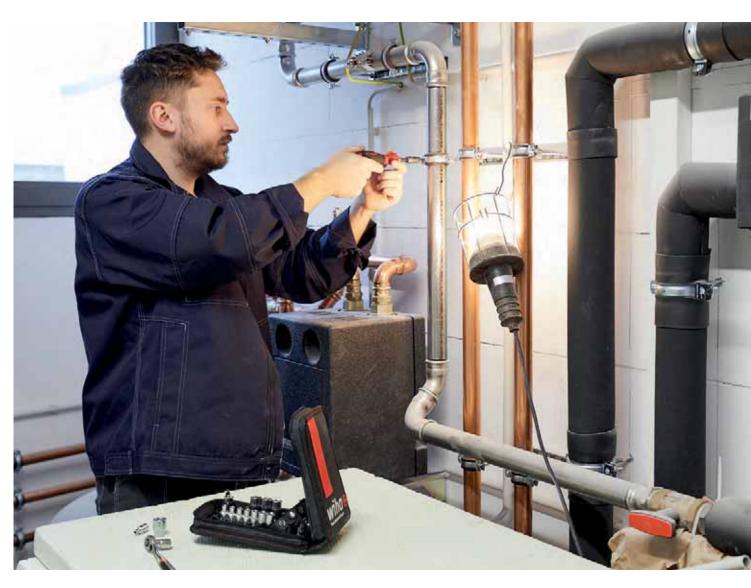







Nut driver and bit set 1/4"









40 pcs. III	cl. multifunctional bag with belt clip	33394
Order-No.		
44684		1
Fastening	/ Jamming	
	Ratchet wrench for nut drivers 1/4" switchable (44666)	128 mm
0	Nut driver insert 1/4" hexagon head 4.0 mm (44 4.5 mm (44677) / 5.0 mm (44670) / 5.5 mm (44 6.0 mm (44672) / 7.0 mm (44673) / 8.0 mm (44 9.0 mm (44675) / 10.0 mm (44676) / 11.0 mm (12.0 mm (44679) / 13.0 mm (44680) / 14.0 mm	671) / 674) / 44678) /
•	Extension 1/4" for nut driver inserts 75 mm (446 150 mm (44668)	667) /
.0	Universal joint with ball Internal square, square f (44682)	nead 1/4"
0	Screwdriver with bit holder SoftFinish® magnetic 112 mm (32160)	: 1/4"
0	Bit holder CentroFix Force mechanically lockable magnetic in box 60 mm (39133)	e 1/4",
Θ	Bit Standard 25 mm Slotted 1/4" C6,3 4.5 mm 5.5 mm (01624) / 6.5 mm (01626)	(01623) /
⊕	Bit Standard 25 mm Phillips 1/4" C6,3 PH1 (016 (01658)	557) / PH2
₩	Bit Standard 25 mm Pozidriv 1/4" C6,3 PZ1 (01 (01689) / PZ3 (01690)	688) / PZ2
•	Bit Standard 25 mm TORX® 1/4" C6,3 T10 (017 (01717) / T20 (01718) / T25 (01719) / T27 (0172 (01721) / T40 (01722)	,
•	Bit Standard 25 mm Hexagon 1/4" C6,3 3.0 mm 4.0 mm (01706) / 5.0 mm (01707) / 6.0 mm (01	
	Tool shaft with ball Square, Internal hexagon 1/4 (01933)	1" C6,3

Based on DIN 3120 / 3122 / 3123 / 3124

Tool Belt Pouch



Ring ratchet open-ended spanner set



Ring ratchet open-ended spanner set

























12 pcs. switchable in holder	303190
Order-No.	
44661	1
Fastening / Jamming	
10 mm (44644) / 11 mm 12 mm (44646) / 13 mm 14 mm (44648) / 15 mm	9 mm x 9 mm (44642) / 10 mm x x 11 mm (44645) / 12 mm x x 13 mm (44647) / 14 mm x x 15 mm (44789) / 16 mm x x 17 mm (44650) / 18 mm x

Various

Based on DIN 3113

12 pcs. in holder		30391
Order-No.		(=)
44665		1
Fastening	ر / Jamming	
	Ring ratchet open-end spanner 8 mm x 8 mm (44638) / 9 mm x 10 mm (44640) / 11 mm x 11 m 12 mm (44653) / 13 mm x 13 m 14 mm (44655) / 15 mm x 15 m	nm (44643) / 12 mm x nm (44654) / 14 mm x

16 mm (44657) / 17 mm x 17 mm (44658) / 18 mm x

18 mm (44659) / 19 mm x 19 mm (44660)

Various


holder

Based on DIN 3113









Double open-end spanner set



12 pcs. in holder	37390
Order-No.	≟
44753	1

Fastening / Jamming

Double open-end spanner set 6 mm x 7 mm (44741) / 8 mm x 9 mm (44742) / 10 mm x 11 mm (44743) / 12 mm x 13 mm (44744) / 14 mm x 15 mm (44745) / 16 mm x 17 mm (44746) / 18 mm x 19 mm (44747) / 20 mm x 22 mm (44748) / 21 mm x 23 mm (44749) / 24 mm x 27 mm (44750) / 25 mm x 28 mm (44849) / 30 mm x 32 mm (44752)

Vario	s

	holder

Based on DIN 3110



















switchable SB3834											
Order-No.	Α	В	0		0		∢œ	‡ mm	‡ mm	mm⊓	
45421							silver			225	1







Reversible ratchet 1/2"



Reversible ratchet 1/4"





















with push button and detent retaining ball

Order-No.		₹ €	*	mm	SB	
45627	1/2"	red / black		250	X	1

with push button and detent retaining ball

Order-No.		∢c	* >	mm	SB		
45626	1/4"	red / black		135	Х	1	

Reversible ratchet 3/8"













with push button and detent retaining ball

Order-No.		∢Œ	❖	l ∢ → l	SB 🔛
45625	3/8"	red / black		175	x 1








Pliers


A cut above the rest for your health.

Wiha pliers combine high-quality materials with ergonomic comfort. Precise interaction between the joints and the exact workmanship of the blades and gripping surfaces ensure optimum functionality. Ergonomically designed and crafted to a high quality standard, they are comfortable to use, causing less body fatigue and thus making work more efficient. The "OptiGrip" triple-point support design for combination and high-leverage combination pliers ensure an optimum, secure hold when handled. The circlip pliers from the Classic Series with their MagicTips® precision tips made of high-performance steel provide added safety and stability. Wiha also supplies suitable tools for stripping, skinning and crimping.

"Thanks to the multifunctional pliers 8in1 from Wiha I can carry out almost all work steps of installing an electrical socket with a single tool. This makes my individual work steps quick and efficient while saving space in my tool bag."

Timo Schweitzer

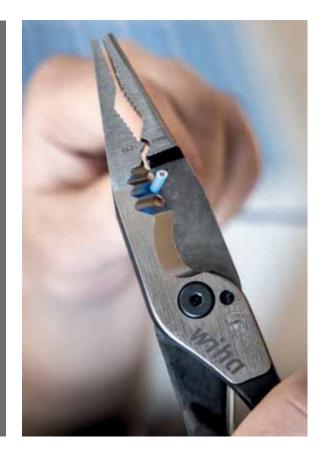

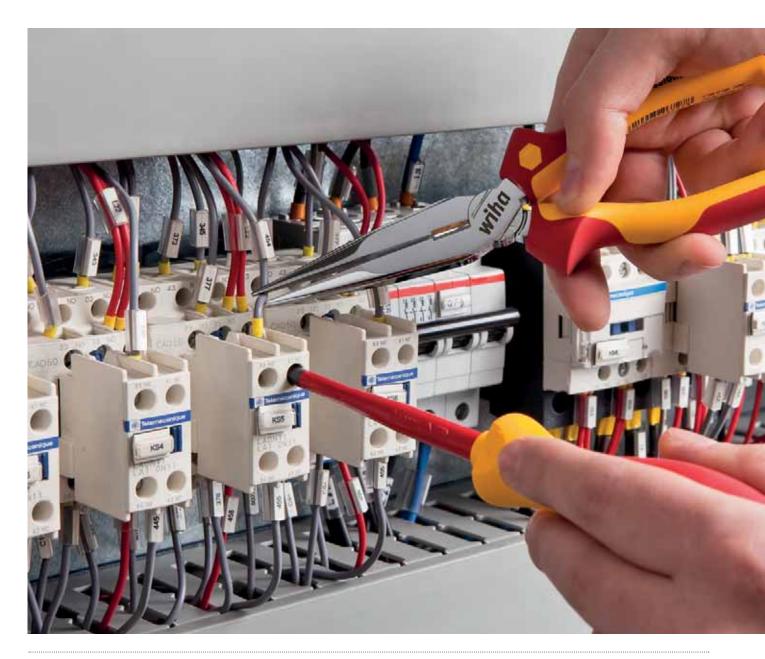

Pliers set Professional electric



DYE STORY





Combination pliers, needle nose pliers, diagonal cutters 3-ncs

Cutters 3-pcs. Z99000106

Order-No.

26852

Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)

Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26708)

Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Manufactured acc. to IEC 60900. DIN ISO 5746, DIN ISO 5749, DIN ISO 5745.





INFOBOX:

Professional pliers Industrial pliers



Professional = chromeplated



Industrial = polished / black oxidised

INFOBOX:

Cutting capacity info

≫.	Example
1 - 5	copper, aluminium
6 - 10	Iron nails
11 - 15	Screws
16 - 21	Hardened spring steel

Pliers set Industrial electric



Combination	pliers,	needle	nose	pliers,	diagonal	
cutters 3-pcs						

cutters 3-	pcs. Z9900010	Z99000109	
Order-No.			
38637		1	
X	Industrial electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43336)		
	Industrial electric combination pliers with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (33186)		
•	Industrial electric needle nose pliers with cutting edge straight shape 200 mm, 8" (33178)		

Manufactured acc. to IEC 60900. DIN ISO 5749, DIN ISO 5746, DIN ISO 5745.





























Multifunctional pliers 8in1 Industrial electric









	with switchable opening spring Z13022509SB										
Order-No.	mm	H II	≯l & mm	mm ²	AWG	≫ mm²	Crimp mm ²	Crimp AWG		SB	
45705	225		3.3	0.75 - 2.5	20 - 14	50	0.5 - 2.5	14 - 21		Х	5

Installation pliers TriCut Professional electric



















							Z 14 1 06
Order-No.	mm	 	※	Ømm	nm²	Ømm	
38853	170	7"	13	1.6	1.5 - 2.5	9 - 12.5	5

Manufactured acc. to IEC 60900.



Manufactured acc. to IEC 60900. DIN ISO 5749.















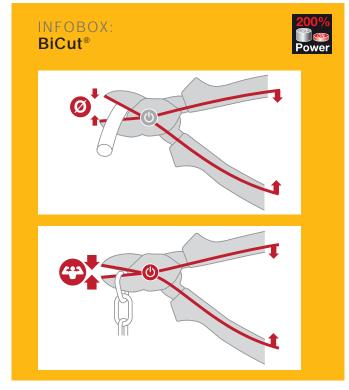

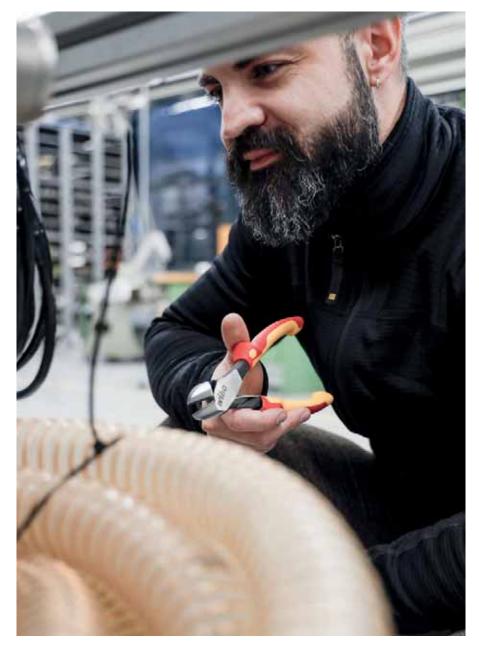






Industrial electric heavy-duty diagonal cutters with DynamicJoint®










Z 12 1 06

INFOBOX: DynamicJoint®

+20 % Power

- Innovative unique joint design
- Effective and powerful cutting (compared to pliers without Dynamic Joint)

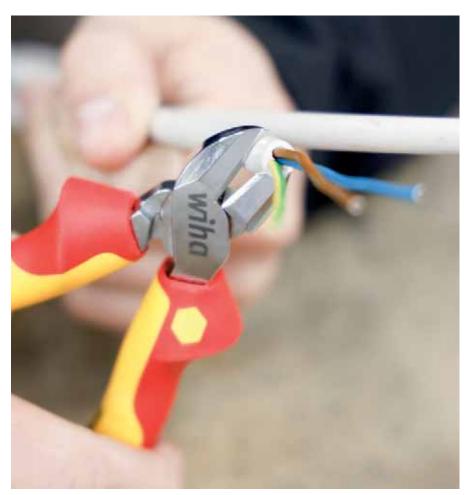



wiha 🍩

Professional electric diagonal cutters with



Order-No.	mm	 	※	\emptyset mm	SB	
43458	160	6 1/2"	16	2	Χ	5
43463	180	7"	17	2.3	Х	5
NA						

Manufactured acc. to IEC 60900. DIN ISO 5749.







Stripping diagonal cutters Professional electric with DynamicJoint®











						Z140	016006SB
Order-No.	mm	 ←	※	Ømn		SB	
27431	160	61/2"	13	1.6	1.5 - 2.5	X	5

Manufactured acc. to IEC 60900. DIN ISO 5749.

Cable cutter Professional electric







Z 50 3 06

with	swi	tch	able	0	penir	ng s	prir	ng
			1 -	- 1	-	_	0	_

Order-No.	mm⊓	 ←	※	≫ mm²	SB	
43664	180	7"	4	50	X	5
43666	210	8 1/4"	5	60	X	5


Manufactured acc. to IEC 60900.









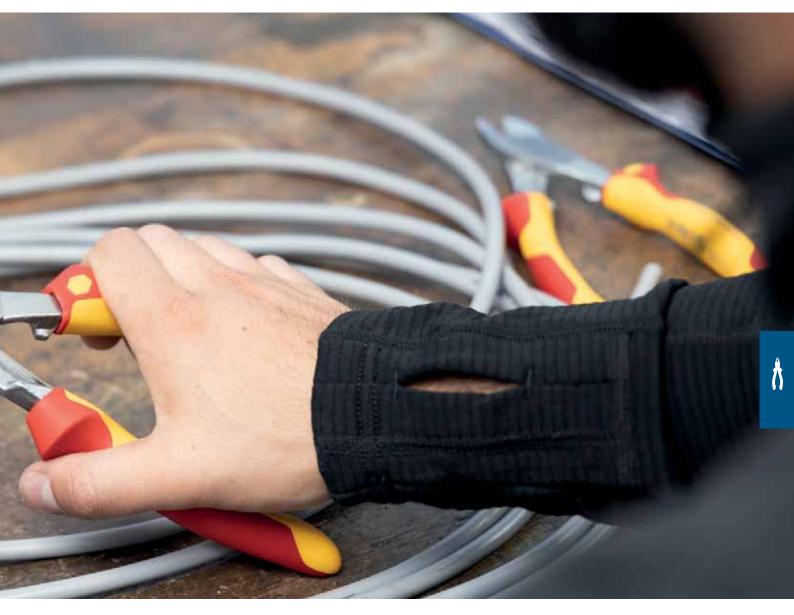

Combination pliers Professional electric with DynamicJoint® and OptiGrip



with	extra	long	cutting	edge
			·····	· · · · · · · · · · · · · · · · · · ·

Order-No.	mm	 	≫(Ømm	SB	
27418	180	7"	16	1.8	X	5


Z 01 0 06

Manufactured acc. to IEC 60900. DIN ISO 5746.







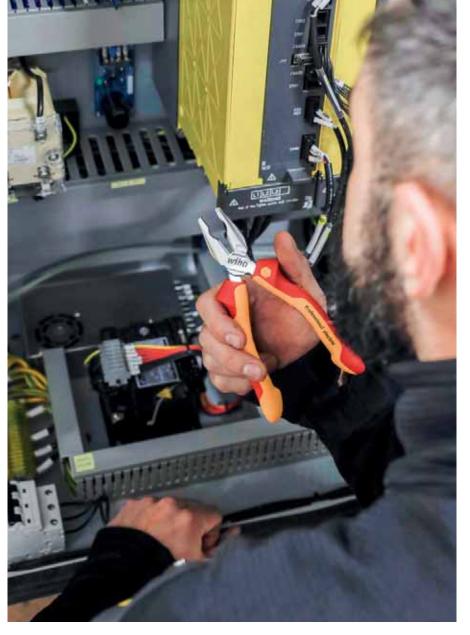




INFOBOX: OptiGrip




- Three-point support
- No twisting or slipping
- Reliable even with larger mouth openings
- Noticeably less effort required



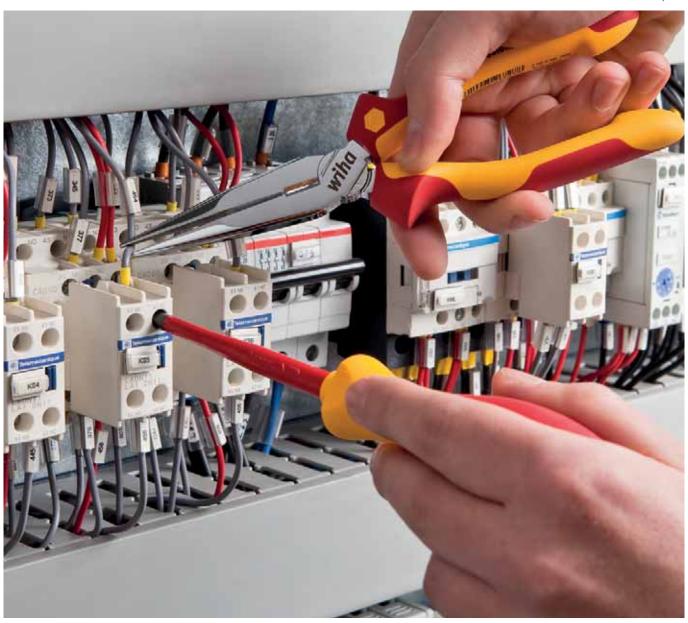

Needle nose pliers Professional electric



Needle nose pliers Professional electric



with cutting	g edge s	traight sl	nape	
Order-No	∢ →	←	≫.	

Order-No.	mm	← →	≫(Ømm	SB	
27422	160	6 1/2"	16	1.2	Х	5
27423	200	8"	17	1.6	Х	5

Manufactured acc. to IEC 60900. DIN ISO 5745.


with cutting ed	lge curved	shape, ap	prox. 40°
-----------------	------------	-----------	-----------

Z	05	1 0)6
•		4	

Order-No.	mm	< 	※	Ømm	SB	
27425	200	8"	17	1.6	Χ	5

Manufactured acc. to IEC 60900. DIN ISO 5745.

Z 05 0 06

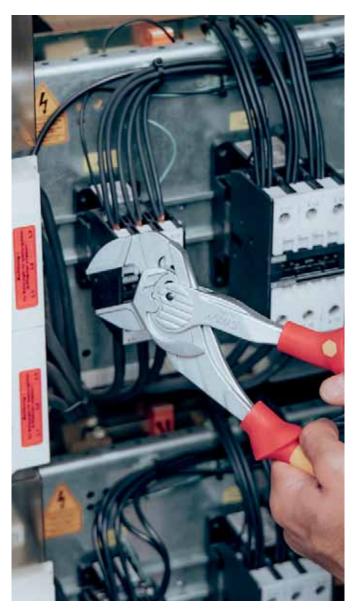



Professional electric water pump pliers









with push	Z 22 0 02					
Order-No.	mm⊓	 	0;	O ;	SB	
38632	250	10"	2"	50 mm	Х	5
DIN ISO 8976.						

					29701
Order-No.	mm	←	0;	SB	
29761	250	10"	46	Х	5
			······		

DIN ISO 9654.





Stripping pliers Professional electric





Z 55 0 06

Order-No.	mm	₩	\emptyset mm	≫ mm²	SB	
27437	160	6 1/2"	5	10	Х	5

Manufactured acc. to IEC 60900.











up to 16 mm²						Z 57 0 06
Order-No.	mm	 	mm²	Ç ∞ AWG	SB	
42062	200	8"	0.03 - 16	32 - 5	X	1





- Skinning: 0.03 16 mm² Cutting to length: 6 10 mm²
 Durable metal cutting insert Changeable cutting insert included in the
- handle
- Adjustable length stop from 3 21 mm



Stripping tool with self-rotating drag blade



for round cal				Z 72 0 06
Order-No.	mm	< 	Ømm	
44240	130	5 1/8"	4 - 28	1



Stripping and assembly tool





for coaxial	Z 73 2 06			
Order-No.	mm⊓	< 	Ømm	
44241	125	5"	6 - 8	1




Stripping multi-tool



for round cable						Z 74 0 06
Order-No.	mm	l ← 	mm²	AWG	SB	
44242	125	5"	0.5 - 6	20 - 10	Х	1



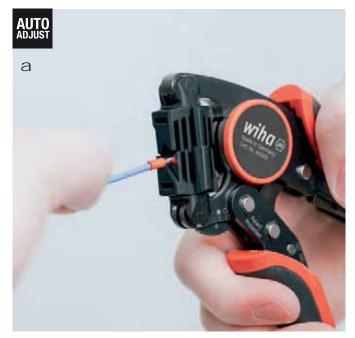





Automatic crimp tool











For wire-end sleeves square crimping with rotating crimping head

rotating crin		ч		2 02 0 00
Order-No.	l ← → l mm	■ € mm²	Ç ∞ AWG	
45223	193	0.08 - 16	28 - 5	1

For processing wire-end sleeves with and without insulating collar as per DIN 46228, EN 50027.







Crimp tool









for MC4 connectors				Z 62 0 06	
Order-No.	mm⊓	Crimp mm ²	AWG	Crimp AWG	
45796	250	2.5 - 6	14 - 10	14 - 10	1





Automatic crimp tool











for wire-end sleeves hex crimping Z 62 0 06				
Order-No.	mm	mm ²	AWG	
41246	210	0.08 - 16		1

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 $\&\,\text{EN}\,50027$


Craftsman's cutters



with crimp				Z 71 7 06
Order-No.	l√ → l	≫ mm²	(SB)	
41923	160	50	Х	5

Crimping tools









Z62000206-01SB for insulated cable eyes and contacts Order-No. mm SB 45957 220 0.5 - 6 20 - 10


For use with pin-shaped cable eyes with insulating sleeve according to DIN 46231, ring-shaped cable eyes with insulating sleeve according to DIN 46237, pin bushing with insulating sleeve according to DIN 46245 Part 1-3.

insulated \	with thr	ree saw blades 15	50 mm	246176
Order-No.		l < → I mm	SB	ੰ≡
43125	150	280	Χ	1

Manufactured acc. to IEC 60900.









Switchable					Z 18 0 02
Order-No.	mm	←	>	Ømm	
38982	200	8"	21	3	5
DIN ISO 5749					









Heavy-duty diagonal cutters Industrial with DynamicJoint®



with switchable opening spring					Z 16 3 02	
Order-No.	mm	← 	≫(Ømm	SB	
41327	200	8"	19	2.8	Х	5
DIN ISO 5749						







Industrial diagonal cutters with DynamicJoint®



						Z 12 1 02
Order-No.	mm	₩	> <	\emptyset mm	SB	
43456	160	6 1/2"	17	2	Х	5
43461	180	7"	18	2.3	Х	5
DIN ISO 5749	•					•



INFOBOX: **DynamicJoint®**



- Innovative unique joint design
- Effective and powerful cutting (compared to pliers without Dynamic Joint)







Combination pliers Industrial with DynamicJoint® and OptiGrip







with extra l						Z 01 0 02
Order-No.	mm	< 	≫<	Ømm	SB	
34307	180	7"	16	1.8	Х	5
DIN ISO 5746.						

Water pump pliers Industrial




with push button					Z 22 0 02	
Order-No.	mm	 	O;	O ;	SB	
34518	250	10"	2"	50 mm	Х	5
36988	300	12"	2 1/2"	63 mm	Х	5

DIN ISO 8976.






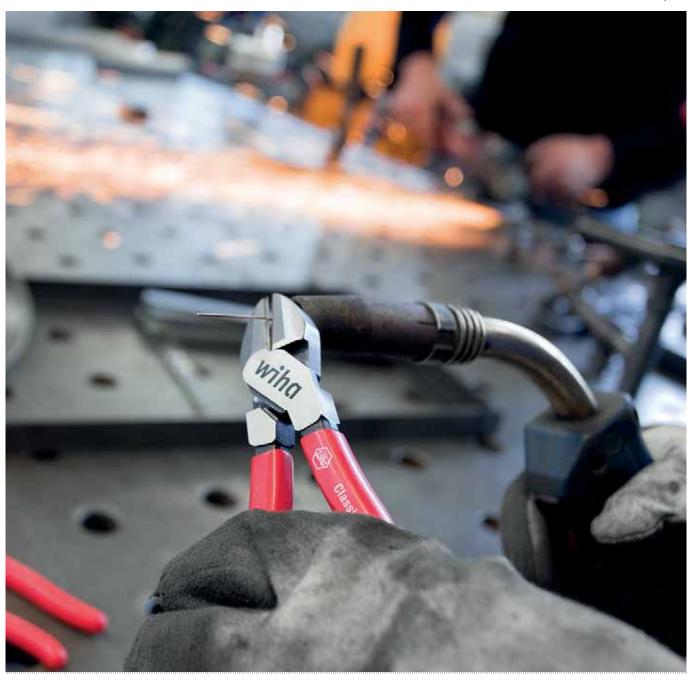

Pliers set Classic





700	$\cap \cap \cap$	۱1	Λ.

Order-No.	==
26850	1
	Combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26706)
X	Diagonal cutters Classic with DynamicJoint® 160 mm, 6 1/2" (43332)
•	Classic needle nose pliers with cutting edge straight shape 160 mm, 6 1/2" (26718)

DIN ISO 5746, DIN ISO5749, DIN ISO 5745













Pliers set Classic with MagicTips®



Circlip pliers 4-pcs.)00701
Order-No.		
34708		1
ී ව	Circlip pliers Classic with MagicTips® for inner rings (holes), straight J 1, 140 mm (34689) / J 2, 180 mm (34690)	
Ů	Circlip pliers Classic with MagicTips® for outer rings (shafts), straight A 1, 140 mm (34699) / A 2, 185 mm (34700)	1

with safety latching function MagicTips® DIN 5256 C, DIN 5254 A.









Pliers wrench Classic



				Z 25 0 01
Order-No.	mm	l < →	O;	
40923	250	10"	46 mm	5




SMD tweezer set Professional ESD



assorted	5-pcs. incl. box	ZP99014002
Order-No.		
32349		1
	Universal tweezers Professional ESD Type (32318)	AA 130 mm
	Precision tweezers Professional ESD Type (32325)	PSF 130 mm
***************************************	SMD tweezers Professional ESD Type 13	120 mm (32340)
	SMD tweezers Professional ESD Type 59	117 mm (32344)
	Вох	
DIN EN 6134	D-5-1.	





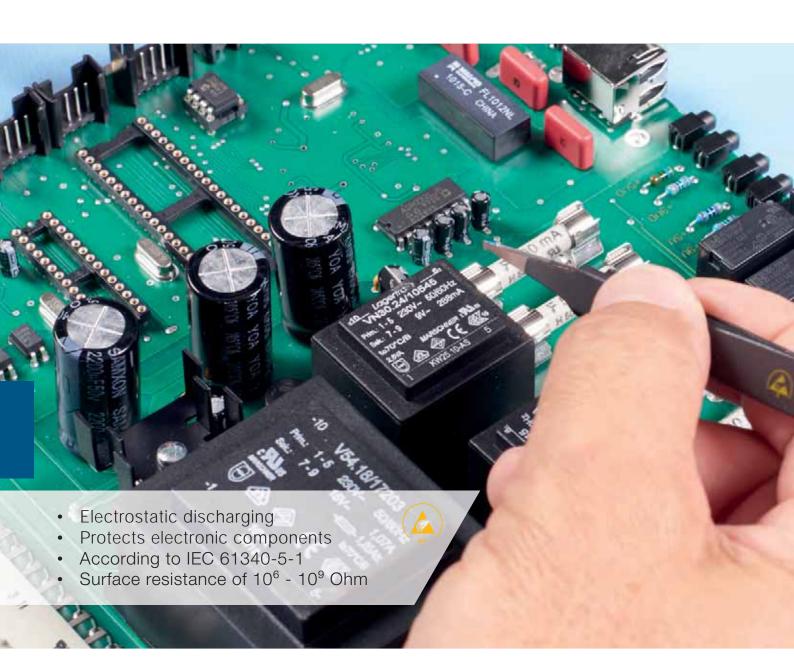



Electronic diagonal cutters




wide, pointed head without bevelled edge							
Order-No.	mm	← 	≫(Ømm	SB		
27391	130	5 1/2"	3	1.3	X	5	
DIN ISO 9654.							

Electronic diagonal cutters



very narrow, pointed head without bevelled edge						
Order-No.	l ∢ → l mm	 	≫(Ømm	SB	
27388	128	5 1/8"	2	0.8	Х	5
DIN ISO 9654.	•					

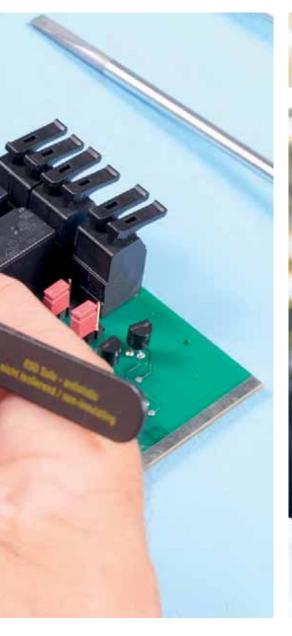




The cutting capacities for our pliers.

Soft wire Plastic, copper, aluminium electrical cable, electrical cable, silver wire				Medium-hard wire Iron nails, brass screws, wire-mesh fencing					
≫ 1	2	3	4	5	≫ 6	7	8	9	10
С	Diagonal cutters	Electronic							





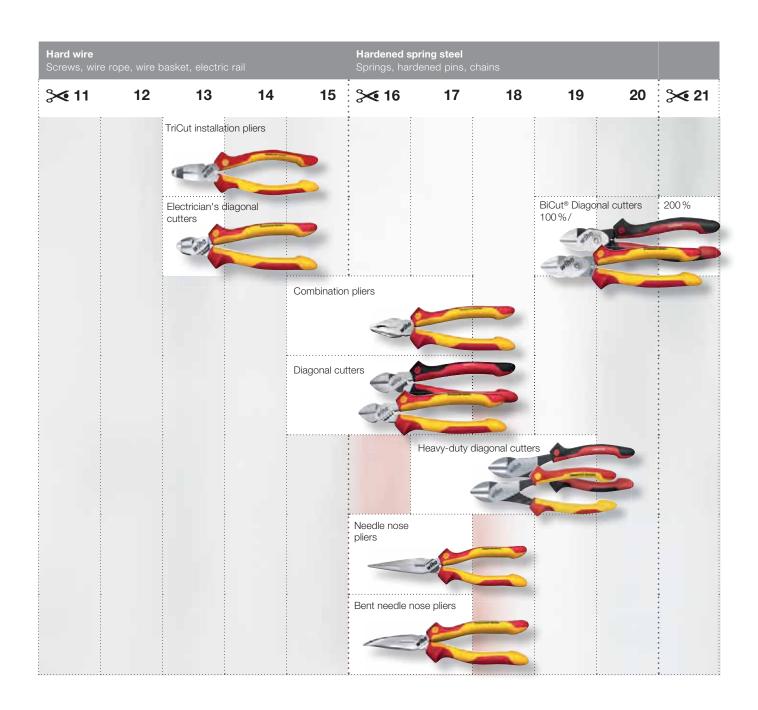





Striking and measuring tools. Optimum force transmission.

With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Removing nails and nail clamps as well as fixing cables and dowels into position without causing damage become extremely simple tasks. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time without making a mess, unlike power tools. Wiha measuring tools prove to be further dependable helpers during electrical installation work. The Wiha

electrician's spirit level allows users to easily mark spaces for up to four flush boxes. This spirit level stands out due to its effortless dimension measurement

"The Wiha spirit level is a big hit! I can see the bubbles perfectly even when taking measurements above my head." Ralf Kästle

and perfectly visible bubbles.





Soft-faced hammer set "Safety"







with ass	orted hammer faces, 9-pcs. incl. box	832B801
Order-No).	
44008		1
	1 x Soft-faced hammer "Safety" medium soft/hahickory wooden handle, round hammer face	ard with
	1 x Face soft round for soft-faced hammer ,safe	ety"
	1 x Face medium-soft round for soft-faced ham ,safety ,	mer
	2 x Face medium-hard round for soft-faced ham ,safety"	nmer
	1 x Face hard round for soft-faced hammer "saf	ety"
	1 x Face very hard round for soft-faced hammer	r "safety"
	1 x 6.0 mm	
	1 x Metal Box	






INFOBOX: Colour code system for Wiha hammer faces

Hammar	Application range				
Hammer face	Application range				
soft (blue)	for sensitive materials, such as those in furniture and interior construction, minor assembly. Material: elastomer.				
medium soft (black)	for robust work, such as paving, tiling, dry wall installation. Material: rubber.				
medium hard (yellow)	universal use, such as for tool and machine manufacture, car repairs, sheet metal and assembly work. Material: polyurethane.				
hard (orange)	for high stress mechanical tasks such as assembly and dismantling work, building and construction work, repair work. Material: cellulose acetate.				
very hard (white)	for high impact work, heavy industry and construction, mould construction, road construction, horticulture and landscaping. Material: polyamide.				
You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/					



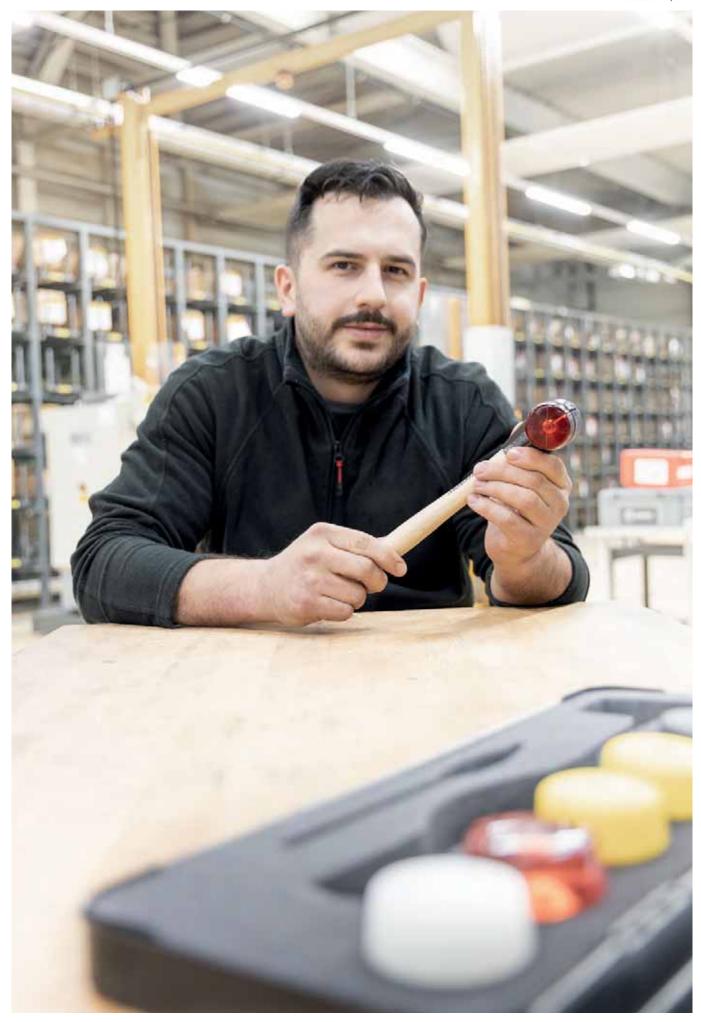





Soft-faced hammer "Safety" medium soft/hard



Soft-faced hammer "Safety" medium soft/hard







with hicko	832-15				
Order-No.	•	-	l < → l mm	J g J	
26653	30	87	290	272	5
26654	40	110	325	620	5

with hicko	832-38			
Order-No.	•1	‡	l √mm l	
26611	30	87	290 306	5

GS tested.







Soft-faced hammer dead-blow



Sledgehammer no recoil, medium hard








with hickory wooden handle, round hammer face

Order-No.	•1	1 *	l ← → I mm	√g →	=
02093	30	115	350	436	5
02097	50	135	385	1085	2
02098	60	165	420	1710	2

GS tested.

with	hickory	wooden	handle,	round	hammer	face	

	,				
Order-No.	•	!	mm⊓	J g J	
02101	80	205	880	4580	2
GS tested.					

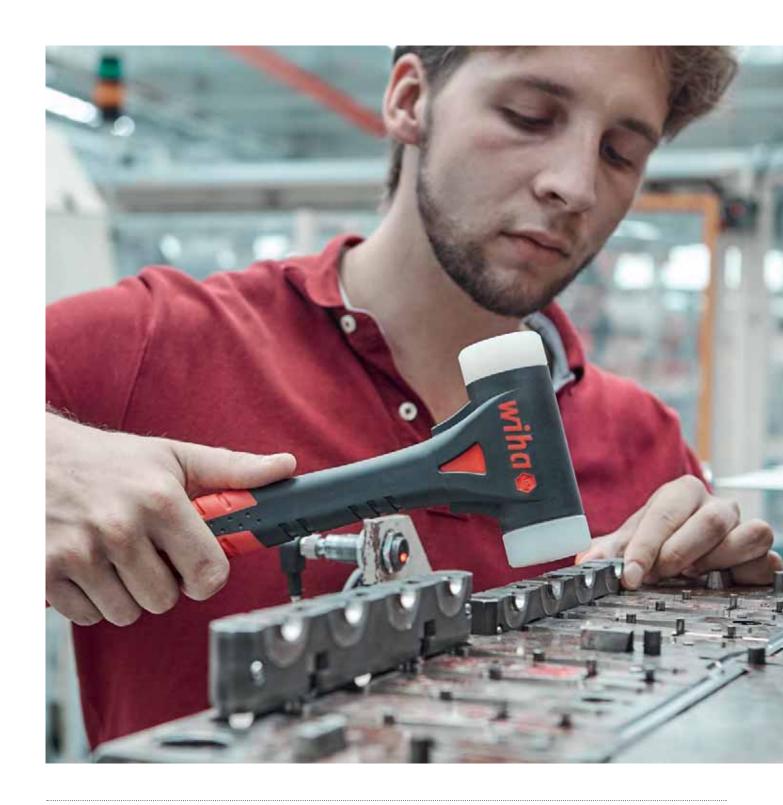

Soft-faced hammer FibreBuzz $^{\! \otimes \! }$ dead-blow, very hard



	ceable hamme		8041
Order-No.	•	J g J	
44598	40	730	1

GS standard acc. to DIN 5134






















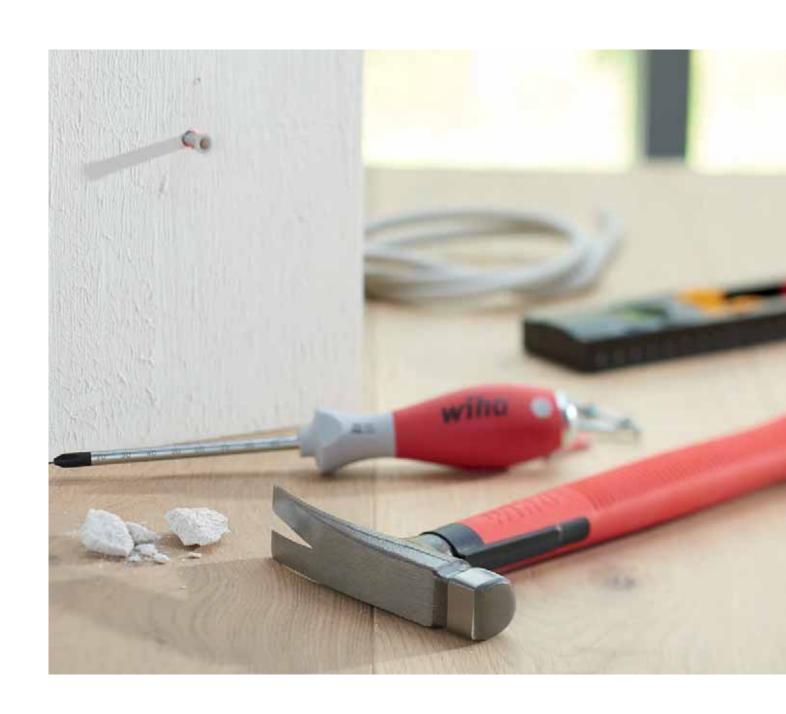











with 300 g	hammer	head		846
Order-No.	<u>+</u>	 ∢ → mm	J g J	=
42071	23.9	283		4







Dowel racket set SoftFinish®



with 6 mm round blade and 4 dowels			
Order-No.			
41289	1		
1 x Dowel racket			
2 x 30 mm dowel / 2 x 40 mm dowel			

















40 cm			246
Order-No.	l ∢ → l mm	↓ g ↓	
42074	400	330	1











Electrician's Longlife® folding ruler, 2 m



metric, 10 segments				4102008
Order-No.	‡	∢œ	↓ g ↓	
42068	15	orange	135	10











Folding ruler LongLife Plus Composite 2 m



	segments			4102005
Order-No.	,	∢c	↓ g ↓	=
37067	15	red / black	124	10

Wiha Order number register

Order no.	Page						
00		27820	110	41003	73	43463	165
00833	74	29234	94	41158	101	43465	35
00834	74	29466	75	41230	68	43613	105
00953	123	29761	170	41231	66	43664	166
01		3		41232	67	43666	166
01034	78	31499	114	41233	67	43707	81
01299	77	32310	142	41235	101	43797	54
02		32311	142	41245	73	43798	55
02093	191	32349	182	41246	175	43847	125
02097	191	33738	108	41286	58	43848	124
02098	191	33741	108	41289	195	43849	119
02101	191	33744	108	41327	177	43850	119
02568	82	33969	37	41330	164	43851	121
03		34307	178	41479	91	43852	121
03591	109	34518	178	41824	133	43879	32
03988	84	34614	93	41827	135	43895	104
03992	122	34686	138	41830	132	43898	95
07		34708	180	41831	132	44008	188
07152	77	35389	73	41832	134	44129	22
07153	77	36068	66	41834	134	44240	172
07155	77	36389	36	41923	175	44241	172
07192	122	36455	73	42062	171	44242	172
07943	139	36558	73	42068	198	44309	54
2		36791	88	42071	194	44318	47
21250	79	36988	178	42074	197	44319	53
23037	113	37067	199	42115	131	44574	39
23041	113	38074	90	42116	131	44598	192
23049	113	38362	73	42136	131	44661	154
24852	126	38605	106	42137	131	44665	154
25477	74	38606	106	42989	75	44684	153
26252	140	38612	101	42990	80	44685	151
26611	190	38613	101	42991	80	44753	155
26653	190	38632	170	42997	80	45215	49
26654	190	38637	161	43023	147	45216	52
26850	179	38853	163	43024	146	45217	51
26852	160	38982	176	43025	148	45218	50
26893	93	38984	163	43125	175	45219	48
26920	83	39049	137	43153	71	45220	56
27388	183	39056	137	43156	71	45221	57
27391	183	39060	137	43159	71	45222	56
27418	168	39971	140	43161	71	45223	173
27422	169	4		43162	71	45292	107
27423	169	40523	25	43167	69	45296	102
27425	169	40674	89	43456	177	45421	156
27431	166	40923	181	43458	165	45528	27





Wiha Order number register

Order no.	Page	ı
45620	123	
45622	127	
45625	157	
45626	157	
45627	157	
45698	60	
45699	62	
45700	61	
45701	63	
45705	162	
45734	21	
45791	46	
45796	174	
45801	41	
45802	43	
45804	71	
45957	175	

Driv	Drives		Ranges		Electro		
٥	Triangular nut	0	Hexagon head	Įi	Temperature measurement	LCD	LCD range
0	Hexagon head		Internal square	•	Overvoltage protection	LCD	LCD precision
0	Square nut	0	Triangular nut	UV	UV light	LCD	LCD overflow display
	Internal hexagon	0	Square nut	₩	Contamination level	LCD	LED ELV display
•	Internal hexagon with drill		Oval-Crimp	\triangle	Warning	LED	LED and signal sound
	hole (tamper-resistant)		Square nut	Ω	Resistance (Ω)	☆ ⟨J))	Humidity
(a)	Tamper Resistant hex	V	Mandrel pressing	Ω	Resistance (text field)		Max. input voltage per
9	Countersink	O	Double bit	>Ω	2 measurement ranges	%	phase (Lx) against neutra
0	Combination drill bit		Internal hexagon	⟨\)	Acoustic signal	Щ.	(N) Max. tolerated voltage
	Pentalobe PL	\$	Scissors cutter		Advert		Measurement range
	Y-type	⊕	Phillips PH (cross-recessed)	(Ex)	ATEX approval	V AC max tol	selection
⊕	Phillips PH (cross-recessed)	****	Pozidriv PZ	U Auto on	Automatic switch on	α	Measuring category
\	Pozidriv PZ (Phillips)		(cross-recessed)	AVG	AVG measurement	<u></u>	Measuring lines
	Internal square	Θ	Slotted		Battery type	CAT	Min. measurement
	Round tip	X	Cutter with bevel	≘ ?	Battery status display	Å	Rated voltage
Θ	Slotted	K	Cutter without bevel		Battery consumption	min	Min. measurement
(Slotted nut	•	Front cutting edge in	NCV	Remote voltage test	TRUE RMS	Rated voltage
	SIT		stripping pliers Flat jaws	A)	Operating temperature	- ģ-	Optical signal
•	Spanner	-			Battery operation	₹ mAh	Battery capacity
•	Twist drill	I	Half round jaws Square peaks	Hold	Data-HOLD	***************************************	Operating time with
1	Sliding sleeve		TORX®	-DI- test	Diode test	<u>.</u> ;	rechargeable battery/
①	Torq-Set®			test 00.00	Display	 ≬ I P	battery set Protection class IP
	TORX®	①	Xeno SL/PH	()	Rotation field indication		Protection class IK
(2)	TORX® with drill hole	*	Xeno SL/PZ		Continuity check	Àk ♣	Light level
	(tamper-resistant)	Elec	tro	ۋ <mark>ا</mark> ۋ س		-Ω- Wh	
	TORX PLUS®	1	Phase display	1))	Continuity check	WII	Watt/hour (w/h)
(4)	Tri-Wing®	*#	Photovoltaic-compatible	出	Permeability test	0	Battery / rechargeable battery removable
	Multitooth	7_	Testing current	Ó	Inherent time	-)0-	Lighting range (m)
	Square reaming blade	REL	Relative value measurement	<u> </u>	Single-pole phase test	⊘	Dimmable
*	Xeno SL/PZ	₽	Protection class	<u></u>	eMobility-compatible	-	Colour temperature
		1	Safety circuit	RCD	FI-test	87A	CRI Color rendering index
		(#WE)	Fuse	Hz	Frequency (Hz)	1	Rechargeable
Driv		V AC	Voltage V AC min – max	+	Handle diameter	<u></u>	Loading time (h)
0	Square nut	V DC	Voltage V DC min – max	₩ -	Background illumination		Illuminance max (lux)
	Square	***************************************	Voltage range phase	nn	Height above sea level	***************************************	Electrical voltage battery
	G7 drive system	<u></u>	against phase	<u> </u>	Integrated flashlight	₽V	(Volt)
0	Threaded connector	A AC	Current A AC	capa mF	Capacity (mF)		
	SDS-Plus®	A DC	Current A DC		Laser light		
	Square nut	(7)	Current input	*	LCD resolution		

TORX®, TORX PLUS®= Registered Trademarks of ACUMENT GlobalTechnologies B.V. ACR/AOT, Tri-Wing®, Torq-Set®= Registered Trademarks of Phillips Screw Company Pozidriv= Registered Trademark of European Industrial Services Ltd.

Torq	ue
0	Hexagon head
	Internal hexagon
	Internal square
\oplus	Phillips PH (cross-recessed)
**	Pozidriv PZ
	(cross-recessed)
Θ	Slotted
	TORX®
	TORX PLUS®
*	Xeno SL/PZ
Mult	itools
	Internal hexagon
	Internal square
0	Hexagon head
	Innenvierkant
+	Phillips PH (cross-recessed)
\	Pozidriv PZ
	(cross-recessed)
Θ	Slotted
	TORX®
*	Xenon SL/PZ
L-ke	ys
	Internal hexagon
	TORX®
Bits	
0	Hexagon head
max. Nm	Max. torque value [Nm]
l * mm¹	Total length
	Internal hexagon
	Pentalobe PL
+	Phillips PH (cross-recessed)
***************************************	Pozidriv PZ
*	(cross-recessed)
Θ	Slotted
(TORX®

Mechanical Tools					
0	Hexagon head				
	Internal square				
	Internal hexagon				
\oplus	Phillips PH (cross-recessed)				
₩	Pozidriv PZ (cross-recessed)				
Θ	Slotted				
	TORX®				
Α	Head diameter				
В	Head diameter				
0	Spanner size				
	Spanner size				
❖	Surface				
⊲ ⊡	Colour				
mm'	Total length				
***************************************	•				

-0	Spanner size
* >	Surface
∢ ⊡	Colour
mm	Total length
***************************************	•
Plier	rs .
AWG	American Wire Gauge
≫ mm²	Max. cross-section / Stripping range
Ømm	Max. diameter
===	Saw blade length
	Oval-Crimp
	Hexagonal crimping
	Square crimping
000	Spring
1	Scissors cutter
X	Cutter with bevel
ľ	Cutter without bevel
•	Front cutting edge in stripping pliers
•	Half round jaws
0;	Max. gripper pipe diameter
0;	Max. gripper width across flats
≫(Cutting force
Ů	External retaining ring
೮	Internal retaining ring

Striking and measuring tools					
1	Width of segments				
•	Face diameter				
√ 0	Colour				
! ──	Hammer head width				

General symbols				
	Packaging unit			
mm"	Total length			
Ømm	Diameter			
. ġ↓	Weight g			
SB]	SB version			
H H	Total length inch			

General information		Ranges		Electro			
Electrician	Recommended for electricians – non-insulated		Case strength),LED	LED light	UĤ	Flexible cable
WOOMIN	Expandable and compatible with EVF products		Wheel-along case	EX	UV light	mV,	Millivolt range
DYE 65 1000 V NEC 60900	VDE tested		Case shape	LASER	Laser for positioning	SAFETY FUNCTION	Voltage check despite empty battery possible
EPA	ESD tested	X	Automatic air compensation valve	Clip	Hands free thanks to retaining clip	()) 0n/0ff	Signal tone that can be switched on and off
4	Voltage test	DOCTORS RECOMMEND	Recommended by doctors and therapists from the German Campaign for Healthier Backs	•	Hands free thanks to magnet	1500V DC	Suitable for testing house photovoltaic systems
業	Cold impact test	+20 % Power	DynamicJoint® - Innovative unique joint design	* DOCTORS RECOMMEND	Recommended by doctors and therapists from the German Campaign for Healthier Backs	1500V DC	Suitable for testing large- scale photovoltaic systems
24h	Test of electrical insulation properties		Actuating tool for spring clips	3X FASTER	3x faster than manual fastening	TypC/TypF	For connector types C and F
!	Pressure test	+40% Power	Heavy-duty diagonal cutters with DynamicJoint®	0.4 1.0 Hm WATERIAL PROTECTION	Material protection function switchable 0.4 / 1.0 Nm	<u>;</u> D=	Integrated torch function
•→	Test of the adhesion of the insulating material coating	Perfect Grip	OptiGrip - Three-point support	MATERIAL PROTECTION	Material protection function 0.4 Nm	⟨)	Signal tone
\Diamond	Testing the burning behavior	SLIM	Access to low-lying screws	2X FASTER	2x faster than manual fastening	TRUE RMS	Effective value specification for AC circuits
VPA Serving	Tested safety	1/2"	1/2 inch	APPROVED	Work safely up to 1,000 V AC	1000 VAC 1000 VDC	Work safely up to 1,000 V AC
		3/8"	3/8 inch	ELECTRIC ROTATION	Electric drive	Signal	Optical light signal
		1/4"	1/4 inch	FIX WITH FEELING	Manual screw tightening	STATUS	Battery status display
		eMOBILITY PERFECT	Suitable for eMobility	STANDARD RECHARGEABLE	Standard rechargeable battery	C360.5	Hands free thanks to retaining clip
			Plenty of storage space	SLIM TECHNOLOGY	Access to low-lying screws	COMPACT	Compact and space- saving
			Stable stand	WOOMIT	Expandable and compatible with EVF products		Daylight white (6500 K)
		int int	Well organised, easy to remove	eMOBILITY PERFECT	Suitable for eMobility	4000 K	Neutral white light (4000 K)
			Sturdy, waterproof bottom tray	Auto off	Automatic switch-off function	<u>xx</u> lm	Lumen
		44 	Many storage options	L1 L2	Rotary field measurement (2 test probes)	ON / OFF SENSOR	Automatic switch-off function
		₩.	Separate laptop/office compartment	L1 L2 L3	Rotary field measurement (3 test probes)	ON/ (M) OFF (E) SENSOR	On/off sensor
			-	eMOBILITY witha PERFECT	For testing hybrid and electric vehicles		

Residual current circuit breaker function test

Very loud signal tone

Screwdrivers		L-keys	evs Mechanical Tools		Torque		
SLIM TECHNOLOGY	Access to low-lying screws	kg F	MagicRing® - Holding function without magnet	HOLDER	Incl. holder	Impact Protection	Impact protection
* DOCTORS RECOMMEND	Recommended by doctors and therapists from the German Campaign for Healthier Backs	kg F MagleSpring	MagicSpring® - Holding function without magnet	(5° 72 FINE TOOTH	Fine toothing	Perfect Grip	Optimum grip
Torque		25.	Ball end can swivel up to 25°	OFFSET ROTATION	15° angled mouth position - Perfect for confined spaces	UV €	Visible in UV light
16%	Precision +-6%	11 25	TORX® ball end; can swivel up to 25°	R/L	Right/left rotation	Hollow Shaft	Hollow handle - Perfekt balance
±10%	Precision +-10%	⇒ L uv	Visible in UV light	10° ANGLED	Reduces the risk of injury	Pliers	
SLIM	Access to low-lying screws	QUICK	Quick and easy access	DOCTORS*	Recommended by doctors and therapists from the German Campaign for Healthier Backs		Stripping area
O,4 Nm MATERIAL PROTECTION	Material protection function	COMPACT	Compact and space- saving	1/2"	1/2 inch	>{*	Cutting-to-length diameter
J //	Actuating tool for spring clips	COMFORT GRIP	Two-component handle	1/4"	1/4 inch	0.2 - 6.0 mm	Length stop
Multitoo	ls	CONTINUOUS	Continuous blade	3/8"	3/8 inch	+20 % Power	DynamicJoint® - Innovative unique joint design
QUICK	Quick access	SIDE DRIVE	Side drive	4 ∑	4in1	+40% Power	Heavy-duty diagonal cutters with DynamicJoint®
COMPACT	Compact and space- saving	Bits		HAND PROTECTION	Reduces the risk of injury	Perfect	OptiGrip - Three-point support
AUTO OPEN	Automatic opening	IMPACT Perfect	Suitable for impact screwdrivers	10°	10° angled	3 =	Cutting-to-length, stripping, skinning
DOUBLE BITS	Double bits	(120x*, Lifetime)	Lifespan 120 times longer	30)	30° swing-back angle	2 ≧	2 functions 1 tool
DOCTORS*	Recommended by doctors and therapists from the German Campaign for Healthier Backs	⇒ ∐ €	Visible in UV light	Striking a	and measuring tools.	200% Power	2 power stages
SLIM TECHNOLOGY	slimTechnology access to low-lying screws	COMPACT	Compact and space- saving	Perfect Balance	Optimal weight distribution	(360°)	Rotatable by 360°
	Actuating tool for spring clips	AUTO OPEN	Automatic opening	Softface	Soft hammer end	AUTO ADJUST	Automatic adjustment
SCALABLE BLADE	Variably adjustable blade length			4 4	Levers out nail clamps	V	Rust protection
				→ /	Fully encased	1000V APPROVED	Work safely up to 1,000 V AC
					Visible from just 10°	Safety Hold	Holding function
				DOCTORS RECOMMEND	Recommended by doctors and therapists from the German Campaign for Healthier Backs		Square crimping
				Perfect Bajance	Optimal weight distribution		Hex crimping
				Dead-blow	No recoil	8 ≧	8in1
				Fibreglass reinforced	Fiberglass-reinforced material	ON / OFF	Opening spring



Wiha Werkzeuge GmbH

Obertalstraße 3-7

78136 Schonach/Germany Phone +49 77 22 959 0 Fax +49 77 22 959 159 Inland

Fax +49 77 22 959 159 Inland Fax +49 77 22 959 155 Export info.de@wiha.com

info.de@wiha.com www.wiha.com

Wiha Tools Ltd.

841 Birchwood Boulevard Warrington WA3 7QU

Phone +44 15 27575 758 +44 15 27910 986

Fax +44 15 27910 023 info.uk@wiha.com www.wiha.com/en

Wiha France SARL

Z. A. de Terrefort 33520 Bruges/France Phone +33 55 6167 935 Fax +33 55 6167 936 servicecommercial@wiha.fr www.wiha.com/fr

Wiha Nordic A/S

Korskildelund 6 2670 Greve/Denmark Phone +45 70 238 045 info.nordic@wiha.com www.wiha.com

WIHA IBERIA / Willi Hahn S.A.

Avda. Sant Julia, 1 Edifici Tilma oficina 17 08400 Granollers / Barcelona / Spain Iberia@wiha.com Tel. +34 93 131 66 18 www.wiha.com/es

Wiha Polska Sp. z o.o.

ul. Budowlanych 10 b 80-298 Gdańsk/Poland Phone +48 58 7623 830 Fax +48 58 7623 900 info.pl@wiha.com www.wiha.com/pl

Wiha in Czech Republic, Slovakia, Hungary, Romania and Croatia

Phone +48 58 7623 830 Fax +48 58 7623 900 michal.moczynski@wiha.com www.wiha.com

Willi Hahn Corp.

516 7th Street East Monticello, MN 55362/USA Phone +1 76 32956 591 Fax +1 76 32956 598 cservice@wihatools.com www.wihatools.com

Wiha Tools Canada Ltd.

394 Deerhurst Drive L6T 5H9, Brampton, ON Phone +1 86 64940 096 Fax +1 80 04947 456 info@wihatools.ca www.wihatools.ca

Wiha Tools (Shanghai) Co.Ltd. Room No. 908 - 910, Building 10,

Long 2777, East Jinxiu Road,
Pudong New District Shanghai,
China 201206
Phone +86 21 64401 119
Fax +86 21 64401 112
info.cn@wiha.com.cn
www.wiha.com.cn

Wiha Finland Oy

Mäkituvantie 9 FI-01510 Vantaa Finland Phone +358 44 231 9988 info.finland@wiha.com www.wiha.com

Wiha Benelux

Phone +32 469 228 257 Info.benelux@wiha.com www.wiha.com

Wiha in Italia

Thoelke Rappresentanze Srl Phone +39 03 32966 039 info.it@wiha.com www.wiha.com/it

Premium Tools Australia Pty Ltd.

Unit 11, 8-20 Anderson Rd Smeaton Grange 2567, NSW Phone +61 02 46841 460 sales@wiha.com.au www.wiha.com.au

Premium Tools (NZ) Ltd.

Unit 1D, 89 Ellice Rd Wairau Valley, 0629, Auckland, New Zealand Phone +64 09 4442 560 sales@wiha.co.nz www.wiha.co.nz

